OMEGAMECHANIX™
ENGINEERED TO LAST

WORKSHOP CATALOGUE

Engineered to last



OMEGA MECHANIX
www.omegamechanix.nl
Official Sponsors of United Autosports

UNITED AUTOSPORTS





WARRANTY CONDITIONS For OMEGA-MECHANIX brand products

OmegaMechanix's products are warranted (for the expected life of the products) against defects in material and workmanship.

Warranty terms:

The warranty applies to all OmegaMechanix's products under regular conditions of use. In case the product is found to be defective by OmegaMechanix (in its sole judgment); OmegaMechanix will repair or replace (at its option) the product without charge.

Disclaimers and Limitations:

This LIMITED WARRANTY does not extend to products manufactured by OmegaMechanix that in its sole judgment were improperly used, altered, abused or repaired by others.

- Ten (10) years limited warranty for OMEGA-MECHANIX hand tools with exception of shank bits, bit sockets, ratchet handles, torque-sockets, torque-wrenches, air impact wrench and electrical impact wrench.
- Two (2) years limited warranty for OMEGA-MECHANIX ratchet handles, torque-sockets, torque-wrenches and air impact wrenches.
- One (1) year limited warranty on all OMEGA-MECHANIX products that are equipped with a battery or 230V power lead.
- No warranty on shank bits and socket bits, or wear items like creeper wheels.

OmegaMechanix is not liable for incidental or consequential costs or losses incurred by product purchaser or user.

Warranty Assessment:

In case of defective articles the customers have to contact their OmegaMechanix further instructions.
The product price is in consideration of limiting OmegaMechanix's liability for products manufactured or distributed.

WARNING!

Familiarize yourself carefully with these products before using. Know the hazards associated with their improper use. Never use these products for any purpose other than for which they are specifically intended.

TOOLS FOR PROFESSIONALS!



OmegaMechanix

OmegaMechanix – established in 1998 - is internationally recognized as a quality brand which offers professional hand tools. Examples of products are gear wrenches, deluxe plier sets, screwdriver sets, tool chests and socket sets. The insistence of offering only the highest quality products has earned OmegaMechanix a reputation for exceptional quality in the automotive branch. The brand is also devoted to supplying safe user-friendly product lines.

OmegaMechanix has launched a whole new webshop in the first half of 2017. Every customer is able to order our products via our webshop www.omegamechanix.nl. OmegaMechanix is also active on different social media channels.

Thanks to our customers' trust and support in the past years, OmegaMechanix is definitely encouraged to devote time and effort to the continuation of efficiently distributing high quality and innovative products to our customers throughout the region. Beside, we provide our customers with excellent after-sales service.

If you have any questions, contact us at sales@omegamechanix.nl or call us +31 (0)76-206 5002.

Professional hand tools











OMEGAMECHANIX™
ENGINEERED TO LAST

Index

Tool cabinet & Tool trolley	Page 6 - 9
Modules (sets)	Page 10 - 11
Modules	Page 12 - 17
Socket sets	Page 18 - 23
Tool set	Page 24 - 27
Adaptor sets	Page 28 - 29
Ratchet handles	Page 30
Gear wrench & sets	Page 31 - 33
Combination & Adjustable wrenches	Page 34 - 35
Pliers set & Wire cutters	Page 36 - 37
Screwdrivers	Page 38 - 39
Torque wrenches & Ratchet handles	Page 40 - 41
Air impact wrenches	Page 42 - 44
Cordless Impact wrenches	Page 45
Impact sockets & Adapters	Page 46 - 47
Automotive misc & Clutch tools	Page 48 - 51
Bearing driver & Oil filling system	Page 52 - 53
Bit sets	Page 54
Rethreading & Locking nut extractor set	Page 55
Pullers & Splitters	Page 56 - 57
Punch, chisel & Hex key sets	Page 58
Wrench, Twist drill bits & Oil drain plug key set	Page 59
Tyre bead seater & Heavy duty pry bars	Page 60
Dead blow hammer & Magnetic holders	Page 61
Induction heater	Page 62 - 63
Hot stapler	Page 64
Auto body repair tools	Page 65
Mechanix display unit	Page 66 - 67

Tool cabinet

M3531 >

Tool Chest - 3 Drawers & Top

Top Chest 676 x 459 x 400
Drawer x3 568 x 398 x 75

- Locking drawers
- Apply for M3760 & M3770

M3500 - MDF02 >

Wooden Top Plate

Top Plate 676 x 459 x 30

- Apply for M3760 & M3770



M3760 >

Tool Cabinet - 6 Drawers

• Handle for push or pull

Top Cabinet	676 x 459 x 815
Drawer x5	568 x 398 x 75
Drawer x1	568 x 398 x 154

- Locking drawers
- You can only open 1 drawer at a time to avoid tilting of cabinet





< M3770

Tool Cabinet - 7 Drawers

• Handle for push or pull

Top Cabinet	676 x 459 x 1005
Drawer x5	568 x 398 x 75
Drawer x2	568 x 398 x 154

- Locking drawers
- You can only open 1 drawer at a time to avoid tilting of cabinet

Tool cabinet & Tool trolley

M3591 >

Tool Cabinet - 6 Drawers & 1 Locker

- 1 Locker with 2 drawers. (Adjustable in height)
- Handle for push or pull

Tool Cabinet	1044 x 459 x 1035
Drawer x1	938 x 398 x 135
Drawer x5	568 x 398 x 75
Drawer x1	568 x 398 x 154
Locker x1	330 x 398 x 588
Drawer x2	300 x 390 x 75

- Locking drawers





< M3593

Tool Trolley - 3 Drawers

- Handle for push or pull

Tool Trolley	860 x 440 x 1000
Drawer x3	568 x 398 x 75

-Locking drawers



< M3397

Tool Trolley - 3 Trays

- Handle for push or pull

Tool Trolley 910 x 459 x 985
Load per shelf max. 35 kg

M3379 >

Tool Chest - 9 Drawers & Top

- With Ball bearing slides

Tool Chest	660 x 307 x 433
Drawer x6	170 x 270 x 50
Drawer x2	570 x 270 x 50
Drawer x1	570 x 270 x 75

- Locking drawers





M3350 >

- Metal Tool Box

Tool Box 475 x 200 x 200mm



Tool Modules

MD02 & MD12

MD02

M0023 >
Drawer 1



M0127 >
Drawer 2

M0032 >
32 Pc Bit Set
See page 110



MD12

Drawer 1

M0048 >
48 Pc 1/4" Drive
Socket Set



M0027 >
27 Pc 1/2" Drive
Socket Set



M0029 >
29 Pc 3/8" Drive
Socket Set



Drawer 2

M0012 >
12 Pc Gear
Wrench Set




M0013 >
13 Pc
Combination
Wrench Set



M0078 >
78 Pc Bit Set

M0032
32 Pc Bit Set



Drawer 3

M8304 >
4 Pc Deluxe
Pliers Set



M8306 >
6 Pc Torx
Screwdriver Set



M8308 >
8 Pc
Screwdriver Set



Drawer 4

M8011 >
11 Pc Hammer &
Punch Set



M8107 >
7 Pc T-Handle
Torx Tamperproof
& Torx Key
Wrench Set



M8207 >
7 Pc T-Handle Ball
Point & Hex Key
Wrench Set



Tool Modules

MD15

Drawer 1

M0048 >
48 Pc 1/4" Drive Socket Set



M0027 >
27 Pc 1/2" Drive Socket Set



M0029 >
29 Pc 3/8" Drive Socket Set



Drawer 2

M0012 >
12 Pc Gear Wrench Set




M0013 >
13 Pc Combination Wrench Set



M0078 >
78 Pc Bit Set

M0032
32 Pc Bit Set



Drawer 3

M8304 >
4 Pc Deluxe Pliers Set



M8306 >
6 Pc Torx Screwdriver Set



M8308 >
8 Pc Screwdriver Set



Drawer 4

M8011 >
11 Pc Hammer & Punch Set



M8107 >
7 Pc T-Handle Torx Tamperproof & Torx Key Wrench Set



M8207 >
7 Pc T-Handle Ball Point & Hex Key Wrench Set



Drawer 5

M0006 >
6 Pc Double Flexible Socket Wrench Set



M8204 >
4 Pc Circlip Pliers Set



M8104 >
4 Pc Combination Wrench Set



Modules

M0127 >

Handtools - 127 Pc - 1/2"Dr. & 1/4"Dr. Sockets - Bits

M0127: 565mm(L) x 393mm(W) x 55mm(H)



Content - 1/2" Dr. :
Ratchet Handle (Quick release / 72 Teeth)
Swivel Handle - 390mm
Universal Joint
Extension Bar - 5"/125mm
Extension Bar - 10"/250mm
Socket (6pt / mm) : 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34
E-Socket (6pt) : E12 - E14 - E16 - E18 - E20 - E22 - E24
Deep Socket (6pt / mm) : 14 - 15 - 17 - 18 - 19 - 22 - 24
Spark Plug Socket (6pt / mm) : 16 - 21
Shank Bit Adaptor - 5/16"

Content - 1/4" Dr. :
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
Spinner Handle - 150mm
Bit Hex + Electric Wrench Adaptor
Bit Adaptor - 1/4"
Flex Bar - 150mm
Extension Bar - 2"/50mm
Extension Bar - 4"/100mm
Socket (6pt / mm) : 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13
E-Socket (6pt) : E4 - E5 - E6 - E7 - E8 - E10 - E11
Deep Socket (6pt / mm) : 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13

Content - Others :
3-Way Adaptor : 3/8"F x 1/4"M - 3/8"F x 1/2"M
Hex Key Set (mm) : 1.5 - 2 - 2.5

Shank Bits - 5/16"

Hex : H10 - H12 - H14
Philips : PH4
Pozi : PZ4
Spline : M5 - M6 - M8 - M10 -M12
Slotted (mm) : 8 - 10 - 12
Torx Tamperproof : TT45 - TT50 - TT55 - TT60



< M0032

Bit Set - 32 Pc
See Page 110 for contents



< M0023

Handtools - 23 Pc
Screwdriver, Pliers & Wrench

M0023: 565mm(L) x 393mm(W) x 55mm(H)

Content:
Combination Wrench (mm) : 8 - 9 - 10 - 11 -12 - 13 - 14 - 15 - 16 - 17 - 19
Water Pliers - 250mm
Long Nose Pliers - 200mm
Combination Pliers - 180mm
Diagonal Cutter - 160mm

Screwdrivers :
Slotted (mm) : 5x75, 6x100, 6x150, 8x200
Philips : PH1x75, PH2x100
Stubby - 38mm : SL6 - PH2

M0048 >

1/4" Dr. Socket set - 48 Pc

M0048: 390mm(L) x 187mm(W) x 45mm(H)



Content:
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
3-Way Adaptor : 3/8"F - 1/4"M
Bit Hex + Electric Wrench Adaptor - 1/4"
Spinner Handle - 150mm
Extension Bar - 2"/50mm
Extension Bar - 6"/150mm
Socket (6pt / mm) : 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13
Deep Socket (6pt / mm) : 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13

Bit Sockets :
Slotted (mm) : 4 - 5.5 - 6.5
Philips : PH1 - PH2 - PH3
Pozi : PZ1 - PZ2 - PZ3
Torx Tamperproof : TT10 - TT15 - TT20 - TT25 - TT27 - TT30 - TT40
Hex : H3 - H4 - H5 - H6 - H8

M0027 >

1/2" Dr. Socket set - 27 Pc

M0027: 390mm(L) x 187mm(W) x 50mm(H)



Content:
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
3-Way Adaptor : 3/8"F - 1/2"M
Extension Bar - 5"/125mm
Extension Bar - 10"/250mm
Socket (6pt / mm) : 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 -
19 - 20 - 21 - 22 - 24 - 27 - 30 - 32
Deep Socket (6pt / mm) : 14 - 15 - 17 - 19 - 22

M0029 >

3/8" Dr. Socket set - 29 Pc

M0029: 390mm(L) x 187mm(W) x 45mm(H)



Content:
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
3-Way Adaptor : 1/2"F - 3/8"M
Extension Bar - 3"/75mm
Extension Bar - 6"/150mm
Socket (6pt / mm) : 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 -
15 - 16 - 17 - 18 - 19 - 20 - 21 - 22
Deep Socket (6pt / mm) : 10 - 12 - 13 - 15 - 17
Spark Plug Socket (6pt / mm) : 16 - 21

Modules

M0012 >

Gear Wrench set - 12 Pc

M0012: 390mm(L) x 187mm(W) x 45mm(H)

Content:
Gear Wrench (mm) : 8 - 10 - 12 - 13 - 14 - 15 - 17 - 19
Adaptors
1/4" Dr. (Quick release) : 10 mm
1/2" Dr. (Quick release) : 13 mm
3/8" Dr. (Quick release) : 19 mm
1/4" Dr. Bit (Mirror polish) : 10 mm



M0013 >

Combination Wrench set - 13 Pc

M0013: 390mm(L) x 187mm(W) x 50mm(H)

Content:
Combination Wrench (mm) : 8 - 9 - 10 - 11 - 12 - 13 - 14 -
15 - 16 - 17 - 18 - 19 - 22





< M2012

Reversible Gear Wrench set - 12 Pc

M2012: 390mm(L) x 187mm(W) x 55mm(H)

Content:
Gear Wrench (mm) : 8 - 10 - 12 - 13 - 14 - 15 - 17 - 19
Adaptors
1/4" Dr. (Quick release) : 10 mm
1/2" Dr. (Quick release) : 13 mm
3/8" Dr. (Quick release) : 19 mm
1/4" Dr. Bit (Mirror polish) : 10 mm



< M8104

Combination Wrench set - 4 Pc

M8104: 390mm(L) x 187mm(W) x 50mm(H)

Content:
Combination Wrench (mm) : 24 - 27 - 30 - 32



M0006 >

Double Flexible Socket Wrench set - 6 Pc

M0006: 390mm(L) x 190mm(W) x 60mm(H)

Content:
Double Flexible Socket Wrench (mm) : 8/9 - 10/11 - 12/13 - 14/15 - 16/17 - 18/19



M8304 >

Deluxe Pliers set - 4 Pc

M8304: 390mm(L) x 190mm(W) x 60mm(H)

Content:
Water Pliers - 250mm
Long Nose Pliers - 200mm
Combination Pliers - 180mm
Diagonal Pliers - 160mm

< M8203

Offset Ring Wrench set - 3 Pc

M8203: 390mm(L) x 187mm(W) x 55mm(H)

Content:
Offset Ring Wrench (mm) : 24/26 - 25/28 - 30/32



< M8204


Circlip Pliers set - 4 Pc

M8204: 390mm(L) x 190mm(W) x 60mm(H)

Content:
External Straight - 180 mm
External Bent - 180 mm
Internal Straight - 180 mm
Internal Bent - 180 mm



Modules

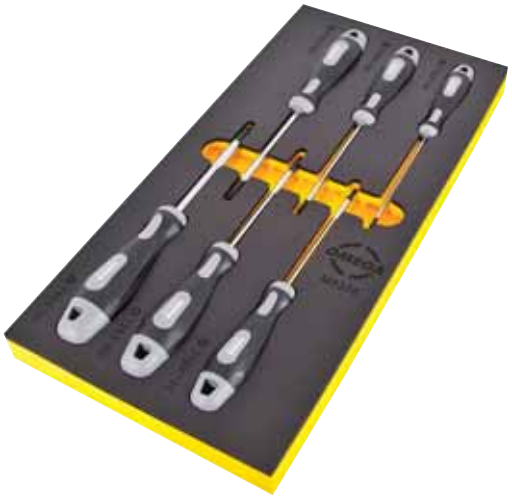

M8308 >

Screwdriver set - 8 Pc

M8308: 390mm(L) x 187mm(W) x 45mm(H)

Content:
Slotted (mm) : 5 x75
Slotted with Hex (mm) : 6 x100 - 6 x150 - 8 x200
Philips: PH1 x75
Philips with Hex : PH2 x100
Stubby - 38mm : SL6 - PH2



M8207 >

T-Handle Ball Point & Hex Key Wrench set - 7 Pc

M8207: 390mm(L) x 187mm(W) x 40mm(H)

Content:
T5 Handle Ball Point & Hex Key Wrench
- 100mm: H2 - H2.5 - H3
- 150mm: H4 - H5 - H6
- 200mm: H8

< M8306

Trox Screwdriver set - 6 Pc

M8306: 390mm(L) x 187mm(W) x 45mm(H)

Content:
Torx Screwdriver
- 100mm: T10 - T15 - T20 - T25 - T30
- 115mm: T40



< M8107

T-Handle Torx Tamperproof &
Torx Key Wrench set - 7 Pc

M8107: 390mm(L) x 187mm(W) x 40mm(H)

Content:
T5 Handle Torx Tamperproof Wrench
& Torx Key Wrench
- 100mm: T10 - T15
- 150mm: T20 - T25 - T27 - T30 - T40



M0078 >

5/16" Bit set - 78 Pc

M0078: 390mm(L) x 187mm(W) x 50mm(H)

Content:
Stubby Ratchet Bit Handle
Philips - 30mm : PH2 - PH3
Slotted - 30mm (mm) : 8 - 10
Torx Tamperproof - 30mm : TT20 - TT25 - TT27 - TT30 - TT40 - TT45 - TT50 - TT55 - TT60
Torx Tamperproof - 75mm : TT20 - TT25 - TT27 - TT30 - TT40 - TT45 - TT50 - TT55 - TT60
Torx Tamperproof - 120mm : T40 - T45 - T50 - T55
Spline - 30mm : M5 - M6 - M8 - M10 - M12
Spline - 75mm : M5 - M6 - M8 - M10 - M12
Hex - 30mm : H5 - H6 - H7 - H8 - H10 - H12
Hex - 75mm : H5 - H6 - H7 - H8 - H10

M0032 >

Bit Set - 32 Pc
See Page 110 for contents





< M0017

1/2"Dr. Impact Socket set - 17 Pc

M0017: 390mm(L) x 187mm(W) x 55mm(H)

Content:
Impact Socket
- 38mm (mm) : 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 19 - 21 - 22
- 42mm (mm) : 24
- 82mm (mm) : 17 - 19 - 21 - 22 - 24

M8011 >

Hammer & Punch set - 11 Pc

M8011: 390mm(L) x 187mm(W) x 40mm(H)

Content:
Punch (mm) : 2x115, 3x125, 4x150, 5x165, 6x180, 8x180
Center Punch (mm) : 2x120
Cold Chisel (mm) : 18x128
Soft Face Hammer (PU) : 460gr/35mm
Enginers Hammer : 300gr





< M8000

Storage module

M8000: 390mm(L) x 187mm(W) x 55mm(H)

Socket set

M1443 >

1/4" Dr. Socket set - 43 Pc

M1443: 290mm(L) x 210mm(W) x 60mm(H)

Content:
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
Spinner Handle - 150mm
Extension Bar - 2"/50mm
Extension Bar - 6"/150mm
Socket (6pt / mm) : 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13
Deep Socket (6pt / mm) : 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13
Bit Adaptor - 1/4"

Shank Bits :
Philips : PH1 - PH2
Pozi : PZ1 - PZ2
Slotted (mm) : 4 - 5.5
Torx Tamperproof : TT10 - TT15 - TT20 - TT25 - TT27 - TT30
Hex : H3 - H4 - H5 - H6

Material : Socket = CR-V / Bit = S2



M3852 >

3/8" Dr. Socket set - 52 Pc

M3852: 380mm(L) x 280mm(W) x 80mm(H)

Content:
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
Extension Bar - 3"/75mm
Extension Bar - 6"/150mm
Socket (6pt / mm) : 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22
Deep Socket (6pt / mm) : 10 - 12 - 13 - 15 - 17
Spark Plug Socket (6pt / mm) : 16 - 21
3-Way Adaptor - 1/2"F

Bit Sockets :
Philips : PH1 - PH2 - PH3
Pozi : PZ1 - PZ2
Slotted (mm) : 5.5 - 6.5
Torx Tamperproof : TT10 - TT15 - TT20 - TT25 - TT30 - TT40 - TT45 - TT50 - TT55
Hex : H3 - H4 - H5 - H6 - H7 - H8 - H10

Material : Socket = CR-V / Bit = S2



Socket set

M1395 >

1/4" & 3/8" Dr. Socket set - 95 Pc

M1395: 380mm(L) x 260mm(W) x 70mm(H)

Content - 1/4" Dr. :
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
3-Way Adaptor - 3/8"F
Bit Adaptor - 1/4"
Spinner Handle - 150mm
Extension Bar - 2"/50mm
Extension Bar - 6"/150mm
Socket (6pt / mm) : 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13
Deep Socket (6pt / mm) : 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13

Bits :
Philips : PH1 - PH2
Pozi : PZ1 - PZ2
Slotted (mm) : 4 - 5.5
Torx Tamperproof : TT10 - TT15 - TT20 - TT25 - TT27 - TT30
Hex : H3 - H4 - H5 - H6

Material : Socket = CR-V / Bit = S2

Content - 3/8" Dr. :
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
3-Way Adaptor - 1/2"F
Extension Bar - 3"/75mm
Extension Bar - 6"/150mm
Socket (6pt / mm) : 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22
Deep Socket (6pt / mm) : 10 - 12 - 13 - 15 - 17
Spark Plug Socket (6pt / mm) : 16 - 21

Bit Sockets :
Philips : PH1 - PH2 - PH3
Pozi : PZ1 - PZ2
Slotted (mm) : 5.5 - 6.5
Torx Tamperproof : TT10 - TT15 - TT20 - TT25 - TT30 - TT40 - TT45 - TT50 - TT55
Hex : H3 - H4 - H5 - H6 - H7 - H8 - H10



M1297 >

1/4" & 1/2" Dr. Socket set - 97 Pc

M1297: 380mm(L) x 280mm(W) x 80mm(H)

Content 1/4" Dr.:
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
3-Way Adaptor - 3/8"F
Spinner Handle - 150mm
Extension Bar - 2"/50mm
Extension Bar - 6"/150mm
Socket (6pt / mm) : 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13
Deep Socket (6pt / mm) : 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13
E-Socket (6pt / mm) : E6 - E7 - E8 - E10 - E11

Bit Sockets :
Philips : PH1 - PH2
Pozi : PZ1 - PZ2
Slotted (mm) : 4 - 5.5 - 6.5
Torx Tamperproof : TT10 - TT15 - TT20 - TT25 - TT27 - TT30 - TT40
Hex : H3 - H4 - H5 - H6 - H8

Material : Socket = CR-V / Bit = S2

Content - 1/2" Dr. :
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
3-Way Adaptor - 3/8"F
Shank Bit Adaptor - 5/16"
Extension Bar - 5"/125mm
Extension Bar - 10"/250mm
Socket (6pt / mm) : 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32
Deep Socket (6pt / mm) : 14 - 15 - 17 - 19
E-Socket (6pt / mm) : E12 - E14 - E16 - E18 - E20
Spark Plug Socket (6pt / mm) : 16 - 21

Content - others : *Shank Bits - 5/16"*
Philips : PH3 - PH4
Pozi : PZ3 - PZ4
Slotted (mm) : 8 - 10 - 12
Torx Tamperproof : TT40 - TT50 - TT55
Hex : H10 - H12 - H14



Socket sets

M1228 >

1/2" Dr. Socket set - 28 Pc

M1228: 380mm(L) x 280mm(W) x 90mm(H)

Content:
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
3-Way Adaptor - 3/8"F
Extension Bar - 5"/125mm
Extension Bar - 10"/250mm
Socket (6pt / mm) : 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32
Deep Socket (6pt / mm) : 14 - 15 - 17 - 19
Spark Plug Socket (6pt / mm) : 16 - 21

Material : CR-V





< M3414

3/4" Dr. Socket set - 14 Pc

M3414: 500mm(L) x 390mm(W) x 100mm(H)
Content:
Ratchet Handle (Quick release / 72 Teeth / Solid / 500mm)
Extension Bar - 4"/100mm
Extension Bar - 8"/200mm
Sliding T-Bar - 450mm
Socket (6pt / mm) : 22 - 24 - 27 - 30 - 32 - 36 - 38 - 41 - 46 - 50

Material : CR-V

M5713 >

3/4" Dr. Socket set - 21 Pc

M5713: 536mm(L) x 345mm(W) x 98mm(H)

Content:
Ratchet Handle (40 Teeth)
Extension Bar - 4"/100mm
Extension Bar - 8"/200mm
Extension Bar - 16"/400mm
Sliding T-Bar - 450mm
Socket (6pt / mm) : 19 - 21 - 22 - 23 - 24 - 26 - 27 - 29 -
30 - 32 - 35 - 36 - 38 - 41 - 46 - 50

Material : CR-V



M8015 >

1" Dr. Socket Wrench set with metal case - 15 Pc

M8015: 500mm(L) x 390mm(W) x 100mm(H)

Content:
Ratchet Handle
Reversible Handle - 635mm
Extension Bar - 8"/200mm
Extension Bar - 16"/400mm
Sliding T-Bar - 450mm
Socket (6pt / mm) : 36 - 41 - 46 - 50 - 55 - 60 - 65 - 70 - 75 - 80

Material : CR-V





Tool set

M0105 >

1/4" & 1/2" Dr. Socket set in aluminum case - 105 Pc

M0105: 565mm(L) x 350mm(W) x 100mm(H)

Content - 1/4" Dr. :
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
Spinner Handle - 150mm
Extension Bar - 2"/50mm
Extension Bar - 4"/100mm
Socket (6pt / mm) : 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13
Deep Socket (6pt / mm) : 8 - 10 - 13
E-Socket (6pt) : E6 - E7 - E8

Bit Sockets :
Philips : PH1 - PH2
Pozi : PZ1 - PZ2
Spline : M4 - M5 - M6
Torx Tamperproof : TT10 - TT15 - TT20 - TT25 - TT27 - TT30 - TT40
Hex : H3 - H4 - H5 - H6

Content - Others :
Ball Key set (mm) : 1.5 - 2 - 2.5 -3 - 4 - 5 - 6 - 8 - 10
Combination Wrench (mm) : 8 - 10 - 12 - 13 - 14 - 17 - 19

Bits - 30mm : 5/16"
Philips : PH3
Pozi : PZ3
Spline : M8 - M10 - M12
Torx Tamperproof : TT45 - TT50 - TT55 - TT60
Hex : H8 - H10

Content - 1/2" Dr. :
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
Shank Bit Adaptor - 5/16"
3-Way Adaptor - 3/8"F
Extension Bar - 4.5"/115mm
Extension Bar - 10"/250mm
Socket (6pt / mm) : 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34
Deep Socket (6pt / mm) : 14 - 15 - 17 - 19 - 22
E-Socket (6pt) : E10 - E12 - E14 - E16 - E18 - E20
Spark Plug Socket (6pt / mm) : 16 - 21

Bit Sockets :
Philips : PH1 - PH2
Pozi : PZ1 - PZ2
Spline : M4 - M5 - M6
Torx Tamperproof : TT10 - TT15 - TT20 - TT25 - TT27 - TT30 - TT40
Hex : H3 - H4 - H5 - H6
Carton=2 pcs / CBM=0.04

Material : Socket = CR-V / Bit = S2





M1500 >

1/2" Dr. & 1/4" Dr. Sockets - 127 Pc

M0127: 560mm(L) x 390mm(W) x 60mm(H)

Content - 1/2" Dr. :
Ratchet Handle (Quick release / 72 Teeth)
Swivel Handle - 390mm
Universal Joint
3-Way Adaptor - 3/8"F
Extension Bar - 5"/125mm
Extension Bar - 10"/250mm
Socket (6pt / mm) : 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 - 34
E-Socket (6pt) : E12 - E14 - E16 - E18 - E20 - E22 - E24
Deep Socket (6pt / mm) : 14 - 15 - 17 - 18 - 19 - 22 - 24
Spark Plug Socket (6pt / mm) : 16 - 21
Shank Bit Adaptor - 5/16"

Content - 1/4" Dr. :
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
Spinner Handle - 150mm
Bit Hex + Electric Wrench Adaptor - 1/4"
Bit Adaptor - 1/4"
3-Way Adaptor - 3/8"F
Flex Bar - 150mm
Extension Bar - 2"/50mm
Extension Bar - 4"/100mm
Socket (6pt / mm) : 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13
E-Socket (6pt) : E4 - E5 - E6 - E7 - E8 - E10 - E11
Deep Socket (6pt / mm) : 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13

Content - Others :
Hex Key Set (mm) : 1.5 - 2 - 2.5
Combination Wrench (mm) : 8 - 9 - 10 - 11 -12 - 13 - 14 - 15 - 16 - 17 - 19
Water Pliers - 250mm
Long Nose Pliers - 200mm
Combination Pliers - 180mm
Diagonal Cutter - 160mm

Shank Bits : 5/16"
Hex : H10 - H12 - H14
Philips : PH4
Pozi : PZ4
Spline : M5 - M6 - M8 - M10 -M12
Slotted (mm) : 8 - 10 - 12
Torx Tamperproof : TT45 - TT50 - TT55 - TT60

Screwdrivers :
- 38mm : SL6 - PH2
- 75mm : SL5 - PH1
- 100mm : SL6 - PH2
- 150mm : SL6
- 200mm : SL8



M0032 >

Bit Set - 32 Pc

See Page 54 for contents





Tool set

M1256 >

1/2" Dr. Tool set - 56 Pc

M1256: 565mm(L) x 350mm(W) x 100mm(H)

Content - 1/2" Dr. :
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
Extension Bar - 5"/125mm
Socket (6pt / mm) : 10 - 11 - 12 - 13 - 15 - 17 - 19 - 22 - 24 - 27
Spark Plug Socket (6pt / mm) : 16 - 21

Content - others :
Hex Key Set (mm) : 1.5 - 2 - 3 - 4
Combination Wrench (mm) : 11 -12 - 13 - 14 - 15 - 17
Water Pliers - 250mm
Combination Pliers - 180mm
Hammer - 300g

Screwdrivers :
- 40mm : SL6 - PH6
- 100mm : SL6 - PH6
- 200mm : PZ8

Content - 1/4" Dr. :
Bit Adaptor - 1/4"/6mm
Spinner Handle - 150mm
Socket (6pt / mm) : 8 - 9 - 10 - 11 - 12 - 13

Bits :
Philips : PH1 - PH2 - PH3
Slotted (mm) : 4 - 5.5 - 7
Torx Tamperproof : TT10 - TT15 - TT20 - TT30
Hex : H3 - H4 - H5 - H6

Material : Socket = CR-V / Bit = S2



M0119 >

1/4" & 1/2" Dr. Tool set - 119 Pc

M0119: 565mm(L) x 350mm(W) x 100mm(H)

Content - 1/2" Dr. :
Ratchet Handle (Quick release / 72 Teeth)
Universal Joint
Bit Adaptor - 5/16"
Extension Bar - 3"/75mm
Extension Bar - 10"/250mm
Extension Bar (Flexible) - 15"/375mm
Socket (6pt / mm) : 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18
19 - 20 - 21 - 22 - 23 - 24 - 27 - 30 - 32
E-Socket (6pt) : E10 - E11 - E12 - E14 - E16 - E18 - E20 - E22
Spark Plug Socket (6pt / mm) : 16 - 21

Bits - 30mm :
Slotted (mm) : 3 - 4 - 5.5 - 7
Philips : PH1 - PH2 - PH3
Torx Tamperproof : TT10 - TT20 - TT25 - TT27 - TT30 -
TT40 - TT45 - TT50

Bits - 75mm :
Hex : H4 - H5 - H6 - H7 - H8 - H10 - H12

Content - others :
Combination Wrench (mm) :
6 - 7 - 8 - 9 - 10 - 12 - 13 - 14
15 - 16 - 17 - 18 - 19 - 21 - 22
24 - 27

Water Pliers - 250mm
Combination Pliers - 180mm
Hammer - 300g

Screwdrivers :
- 40mm : SL6 - PH6
- 200mm : SL8 - PH8

Content - 1/4" Dr. :
Ratchet Handle (Quick release / 72 Teeth)
Spinner Handle - 150mm
Universal Joint
Bit Adaptor
Extension Bar - 2"/50mm
Extension Bar - 4"/100mm
Extension Bar (Flexible) - 6"/150mm
Sliding T-Bar - 110mm
Socket (6pt / mm) : 4 - 5- 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13

Bits :
Slotted (mm) : 3 - 4 - 5.5 - 7
Philips : PH1 - PH2 - PH3
Pozi : PZ1 - PZ2 - PZ3
Torx Tamperproof : TT10 - TT15 - TT20 - TT30
Hex : H3 - H4 - H5 - H6

Material : Socket = CR-V / Bit = S2



Adaptor sets

M1210 >

Extension Bar set - 9 Pc

M1210: 280mm(L) x 182mm(W) x 50mm(H)

Content
Extension Bar
- 50mm / 2" : 1/4" - 1/2"
- 75mm / 3" : 3/8"
- 100mm / 4" : 1/4" - 3/8"
- 125mm / 5" : 1/2"
- 225mm / 9" : 1/4" - 3/8"
- 250mm / 10" : 1/2"

Material : CR-V





< M1234

Adaptor set - 6 Pc

M1234: 150mm(L) x 107mm(W) x 50mm(H)

Content
Adaptor
- 1/4"(M) : 3/8"(F)
- 3/8"(M) : 1/4"(F) - 1/2"(F)
- 1/2"(M) : 3/8"(F) - 3/4"(F)
- 3/4"(M) : 1/2"(F)

Material : CR-V

M1208 >

Dr. Adaptor & Universal Joint set - 8 Pc

Content :
Dr. Universal Joint : 1/4" - 3/8" - 1/2"
Dr. Adaptor :
- 1/4" (M) : 3/8" (F)
- 3/8" (M) : 1/4" (F) - 1/2" (F)
- 1/2" (M) : 3/8" (F)

Bit Adaptor : 1/4"

Material : CR-V





< M0043

1/4", 3/8" & 1/2" Dr. Xi-on Socket set - 43 Pc

The Xi-on Socket Set offers an improved design on the point of contact and always succeeds in those approximately 85% rounded nuts/bolts compared to conventional sockets.

Features:

- Protects the nut/bolt, prevents the nut/bolt from rounding.
- High performance design allows the socket to contact the nut/bolt away from the corner while the torque can evenly spread all over the head of the nut/bolt makes the turning labor-saving.
- Extends the life of a nut/bolt.

Content :
- 1/4" Dr. : 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm

- 3/8" Dr. : 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24 mm

- 1/2" Dr. : 8, 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 22, 24, 27, 30, 32 mm

M0004 >

Demo block



M0034 >

Star Bit Socket set - 34 Pc



Content :

E-Socket :
- 1/4" : E4 - E5 - E6 - E7 - E8
- 3/8" : E10 - E12 - E14 - E16
- 1/2" : E18 - E20

Bit Socket - Torx :
- 1/4" : T8 - T10 - T15 - T20 - T25 - T27 - T30
- 3/8" : T40 - T45 - T47 - T50
- 1/2" : T55 - T60

Bit Socket - Torx Tamperproof :
- 1/4" : TT10 - TT15 - TT20 - TT25 - TT27 -TT30
- 3/8" : TT40 - TT45 - TT50
- 1/2" : TT55

Material : CR-V



< M2435

1/4" Reversible Bit & Socket Ratchet Handle set - 35 Pc

M2435: 173mm(L) x 105mm(W) x 42mm(H)

Content - 1/4" Dr:
Ratchet Handle (Double reversible / 72 Teeth)
Bit Adapter - 4"
Extension Bar - 4"/100mm
Socket (6pt / mm) : 4 - 4.5 - 5 - 5.5 - 6 - 7 - 8 - 9 -10 - 11 - 12 - 13

Bits :
Slotted (mm) : 4 - 5.5 - 6.5
Philips : PH1 - PH2 - PH3
Pozi : PZ1 - PZ2 - PZ3
Torx Tamperproof : TT10 - TT15 - TT20 - TT25 - TT27 - TT30
Hex : H3 - H4 - H5 - H6 - H8

Ratchet handles

Ratchet handles >

M0142 : 1/4" Ratchet Handle - 72 Teeth
Length - 132mm

M0382 : 3/8" Ratchet Handle - 72 Teeth
Length - 270mm

M0122 : 1/2" Ratchet Handle - 72 Teeth
Length - 435mm


M0142


M0382


M0122





M0141 : 1/4" Ratchet Handle - 72 Teeth

M0121 : 1/2" Ratchet Handle - 72 Teeth

M0381 : 3/8" Ratchet Handle - 72 Teeth

M0003 >

Stubby Ratchet Handle set - 3 Pc

M0003 : 181mm(L) x 138mm(W) x 38mm(H)

Content :
Ratchet Handle - 72 Teeth (Stubby) :
- 95mm : 1/4"
- 115mm : 3/8"
- 150mm : 1/2"

Material : CR-V





M7580 - M7599 >

Gear wrenches

M7580 : 8mm / 140mm(L) x 16.5mm(W)
M7583 : 9mm / 143mm(L) x 19.0mm(W)
M7584 : 10mm / 160mm(L) x 20.7mm(W)
M7585 : 11mm / 168mm(L) x 22.4mm(W)
M7586 : 12mm / 174mm(L) x 23.7mm(W)
M7587 : 13mm / 180mm(L) x 25.7mm(W)
M7588 : 14mm / 193mm(L) x 27.4mm(W)
M7589 : 15mm / 200mm(L) x 28.8mm(W)
M7591 : 16mm / 216mm(L) x 30.4mm(W)
M7592 : 17mm / 233mm(L) x 32.3mm(W)
M7593 : 18mm / 239mm(L) x 33.4mm(W)
M7594 : 19mm / 250mm(L) x 34.5mm(W)
M7596 : 21mm / 285mm(L) x 42.0mm(W)
M7597 : 22mm / 285mm(L) x 42.0mm(W)
M7598 : 24mm / 325mm(L) x 47.0mm(W)
M7599 : 25mm / 325mm(L) x 47.5mm(W)

Material : CR-V





< M7808 - M7819

Reversible gear wrenches

M7808 : 8mm / 135mm(L) x 17.0mm(W)
M7809 : 9mm / 148mm(L) x 18.5mm(W)
M7810 : 10mm / 158mm(L) x 20.0mm(W)
M7811 : 11mm / 165mm(L) x 22.0mm(W)
M7812 : 12mm / 172mm(L) x 23.0mm(W)
M7813 : 13mm / 176mm(L) x 25.0mm(W)
M7814 : 14mm / 191mm(L) x 27.0mm(W)
M7815 : 15mm / 206mm(L) x 33.0mm(W)
M7816 : 16mm / 208mm(L) x 30.0mm(W)
M7817 : 17mm / 231mm(L) x 37.0mm(W)
M7818 : 18mm / 234mm(L) x 37.0mm(W)
M7819 : 19mm / 246mm(L) x 39.0mm(W)

Material : CR-V

M2402 >

Reversible multi gear wrench - 2 Pc

Specification :

Fits 5 different nut and bolt styles:
- 6pt Hex : 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4"
- 12pt Hex (mm) : 8, 10, 11, 13, 14, 16, 17, 19
- External Torx : E10, E12, E14, E18, E20, E24
- Spline : M10, M12, M14, M16, M18, M20, M22
- Square: 5/16", 3/8", 7/16", 1/2", 9/16"

Material : CR-V



Gear wrench sets

M2305 >

Gear Wrench set (72 Teeth) - 5 Pc

M2305: 280mm(L) x 190mm(W) x 50mm(H)

Content:
Gear Wrench (72 Teeth / mm) : 8 - 10 - 13 - 17 - 19

Material : CR-V





< M2308

8 Pc Gear Wrench Set, 72 teeth, CR-V 6140.

M2308: 275mm x 200mm x 50mm (LxWxH)

Content:
8 - 10 - 12 - 13 - 14 - 15 - 17 - 19 mm

M2312 >

12 Pc Gear Wrench Set, 72 teeth, CR-V 6140.

M2312: 295mm x 290mm x 60mm (LxWxH)

Content:
8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm



Reversible gear wrench sets



< M2405

Reversible Gear Wrench set (72 Teeth) - 5 Pc

M2405: 280mm(L) x 190mm(W) x 50mm(H)

Content:
Gear Wrench (Reversible / 72 Teeth / mm) :
8 - 10 - 13 - 17 - 19

Material : CR-V

M2408 >

Reversible Gear Wrench set (72 Teeth) - 8 Pc

M2408: 275mm(L) x 200mm(W) x 50mm(H)

Content:
Gear Wrench (Reversible / 72 Teeth / mm) :
8 - 10 - 12 - 13 - 14 - 15 - 17 - 19

Material : CR-V





< M2412

Reversible Gear Wrench set (72 Teeth) - 12 Pc

M2412: 295mm(L) x 290mm(W) x 60mm(H)

Content:
Gear Wrench (Reversible / 72 Teeth / mm) :
8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19

Material : CR-V

Combination wrenches



< M2339

Combination Wrench set - 13 Pc

Content :
Combination Wrench (mm) :
8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17
18 - 19 - 22

Material : CR-V



M9104 >

Combination Wrench set - 4 Pc

Content :
Combination Wrench (mm) : 24 - 27 - 30 - 32

Material : CR-V



Adjustable wrenches & Plier sets

M2560, M2562, M2563 >

Adjustable Wrenches

M2560 : 8" / 200mm
Material : CR-V

M2562 : 10" / 250mm
Material : CR-V

M2563 : 12" / 300mm
Material : CR-V





< M2502

Self adjusting multi-grip pliers - 2 Pc

Specification :

- Innovative design allows the jaws to automatically adjust to any size.
- Straight and V-type jaws for hex, square and round objects.

Set includes 175mm(L) & 255mm(L) pliers
Jaw capacity : 40mm & 60mm



M9416 >

Hose pinch off plier set - 3 Pc

Content :
(L) 8 inch - 203mm
(L) 10 inch - 254mm
(L) 12 inch - 304mm

Pliers set

M9304 >

Deluxe Pliers set - 4 pc

M9304: 390mm(L) x 190mm(W) x 60mm(H)

Content
Water Pliers - 250mm
Long Nose Pliers - 200mm
Combination Pliers - 180mm
Diagonal Pliers - 160mm

Material : CR-V





< M9438

Hose Clamp Pliers Jaw : 0-38 mm
Material : CR-MO

< M9455

Hose Clamp Pliers Jaw : 22-55 mm
Material : CR-MO

M9410 >

CV Boot Clamp Pliers

For easy installation of ear-type clamps on fuel filters water pumps, other cooling system hose and CV joint clamps.





< M9411

CV Boot Band Cutter - L=216mm

Special design to easily cut the stainless steel clamps without damaging the CV boot. Spring loaded action with heat treated 440 steel jaes and comfort grip handles.



< M9402

Adjustable Wire Cutter / Stripper Tool

- Easily Cuts and strips wire 0.75 ~ 4.0 mm.
- Automatically adjusts to wire size.

M9403 >

2 in 1 Plier Wire Stripper & Wire Cutter

- 3-Function wire tool with reverse switch action and build in safety lock.
- Stripping Capacity : 0.8 - 1.0 - 1.3 - 1.6 - 2.0 - 2.6mm
  20 - 18 - 16 - 14 - 12 - 10 AWG





< M9404

Multi-Purpose 4-in-1 Cutter

- Pliers in nose.
- Easily cuts and strips wire Ø0.26 ~ Ø8.0 ~ mm.
- TPR handles for comfortable soft grip.

M9405 >

Oblique Cutter - 5"

- High quality diagonal cutter pliers designed for precision work, durable and sharp cutting edge by CNC grinding machine.
- This tool is the best choice for making the flush cut in any soft wire.
- It is also suitable for injestion gate, electronic repair, craftwork or jewelry making ect.
- It offers user a TPR confortable soft grip and return spring action.
- Use for plastic or under 2.0 mm soft material only.





< M9406

Multi-Purpose 5-in-1 Cutter

- Crimps insulated terminals 1.5 - 2.5 - 6.0 mm2.
- Crimps open barrel terminals & disconnectors 1.5 - 2.5 - 6.0 mm2.
- Easily cuts and strips wire 0.75 - 1.0 - 1.5 - 2.5 - 4.0 - 6.0 mm2.
- Cleanly shears bolts M2.6 - M3.0 - M3.5 - M4.0 - M5.0.
- TPR handles for comfortable soft grip.

Screwdrivers




< M9305

Screwdriver set - 5 Pc

M9305: 300mm(L) x 125mm(W) x 40mm(H)

Content :
Slotted (mm) : 3.5 x 75 - 5.5 x 125 - 6.5 x 150
Philips : PH1 x 80 - PH2 x 100

Material : CR-V

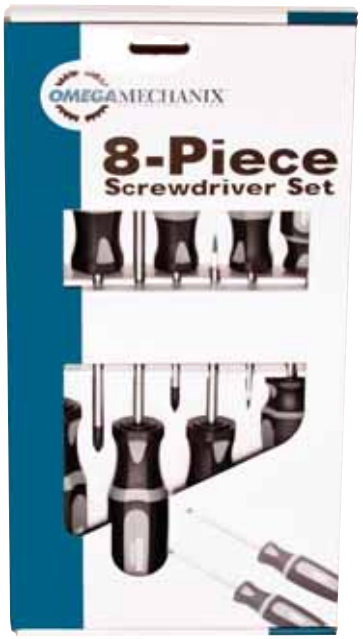

M9308 >

Screwdriver set - 8 Pc

M9308: 390mm(L) x 190mm(W) x 60mm(H)

Content :
Slotted (mm) : 5 x75
Slotted with Hex (mm) : 6 x100 - 6 x150 - 8 x200
Philips : PH1 x75
Philips with Hex : PH2 x100
Stubby - 38mm : SL6 - PH2

Material : CR-V



< M9306

Trox Screwdriver set - 6 Pc

M9306: 300mm(L) x 165mm(W) x 40mm(H)

Content :
Torx Screwdriver
- 100mm : T10 - T15 - T20 - T25 - T30
- 115mm : T40

Material : CR-V

M9307 >

Hexagon Screwdriver set - 7 Pc

M9307: 211mm(L) x 316mm(W) x 40mm(H)

Content :
- 75 (mm) : 2.5, 3.0
- 100 (mm) : 4.0, 5.0
- 125 (mm) : 6.0
- 150 (mm) : 8.0, 10.0





< M9383

Stubby Screwdriver set - 3 Pc

M9383: 113mm(L) x 115mm(W) x 37mm(H)

Content :
Philips : PH2 x 38
Slotted (mm) : 6.5 x 38
Pozi : PZ2 x 38

Material : CR-V


M9393 >

Long Screwdriver set - 3 Pc

M9393: 525mm(L) x 155mm(W) x 37mm(H)

Content :
Philips : PH1 x 400
Slotted (mm) : 4 x 400
Pozi : PZ1 x 400

Material : CR-V

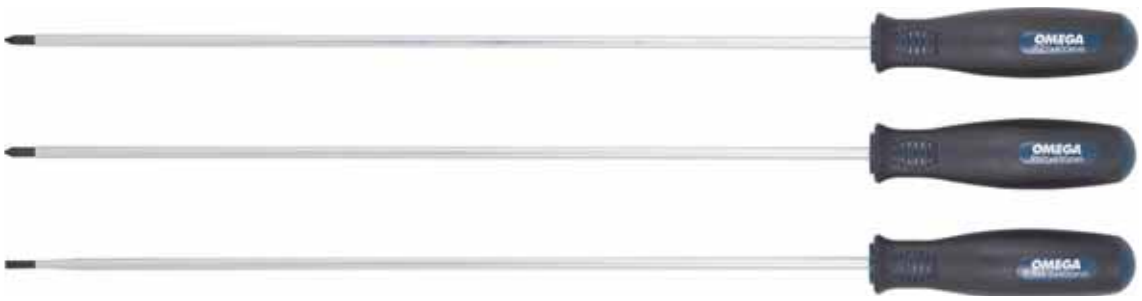

Torque wrenches

M030N, M110N, M210N, M500N >

M030N : Torque Wrench - 1/4" / 6 - 30Nm
Length - 285mm

M110N : Torque Wrench - 3/8" / 19 - 110Nm
Length - 365mm

M210N : Torque Wrench - 1/2" / 40 - 210Nm
Length - 518mm

M500N : Torque Wrench - 1/2" / 100 - 500Nm
Length - 518mm











< M2214, M2238, M2212

M2214 : Dual Way Torque Wrench - 1/4" Dr.
Range - 5 - 25 Nm
Length - 245mm

M2238 : Dual Way Torque Wrench - 3/8" Dr.
Range - 20 - 100 Nm
Length - 410mm

M2212 : Dual Way Torque Wrench - 1/2" Dr.
Range - 60 - 340 Nm
Length - 610mm



< M1000N






M1000N : Torque Wrench - 1" / 1000Nm

Torque wrenches & Ratchet handles

M1500N >

M1500N : Torque Wrench - 1" / 1500Nm





M1219 >




Telescopic Ratchet Handle - 1/2" Dr.
M1219 : Max. Torque=750 Nm /
330-485mm (13"-19") / 48 Teeth



M7320 >

Breaker Bar - 1/2" Dr.
M7320 : Length 600mm





M3424 >

Extension Telescopic Ratchet Handle - 3/4" Dr.
M3424 : Max. Torque=1074 Nm / 610 - 915mm (24"-36") / 24 Teeth



Air impact wrenches





< M2063

Air Impact Wrench - 1/2" Dr.

Specification :

Square Drive	- 1/2"
No-Load Speed	- 8200rpm
Max Torque	- 1250 Nm / 922 ft-lb
3 Torque Forward	- Low : 245 Nm / 180 ft-lb
	- Medium : 650 Nm / 480 ft-lb
	- High : 990 Nm / 730 ft-lb
Air Consumption	- 245 Liter/Minute
Air Hose (I.D.)	- 8 mm
Air Inlet	- 1/4"
Weight	- 2.1 kg / 4.6 lb
Impacts per minute	- 1500

M2060 >

Ultra Compact Air Impact Wrench - 3/8" Dr.
Twin Hammer, Handle Exhaust

Specification :

Square drive	- 3/8"
No-Load speed	- 11000 rpm
Max Torque	- 610 Nm / 450 ft-lb
Air pressure	- 90 PSI / 6.3 Bar
Air Consumption	- 200 Liter/Minute
Air Hose (I.D.)	- 10 mm
Air Inlet	- 1/4"
Impacts per minute	- 1500







< M2064

Ultra Compact Air Impact Wrench - 1/2" Dr.
Twin Hammer, Handle Exhaust
Supplied with 1/2"(f) & 3/4"(m) adaptor

Specification :

Square drive	- 1/2"
No-Load speed	- 9000 rpm
Max Torque	- 1356 Nm / 1000 ft-lb
Air pressure	- 90 PSI / 6,3 Bar
Air Hose (I.D.)	- 10 mm
Air Inlet	- 1/4"
Impacts per minute	- 1500

M2062 >

Air Impact Wrench - 1/2" Dr.

- Twin Hammer
- Light Weight, Aluminum & Composite
- 3 Forward Speed & 2 Reverse Speed
- Maximum Torque 1356 Nm

Specification :

Square Drive	- 1/2"
No-Load Speed	- 10000rpm
Max Torque	- 1356 Nm / 1000 ft-lb
Torque Forward	- 950 Nm / 700 ft-lb
Torque Reverse	- 1020 Nm / 752 ft-lb
Air Pressure	- 90 PSI / 6.3 Bar
Air Consumption	- 153 Liter/Minute
Air Hose (I.D.)	- 10 mm
Air Inlet	- 1/4"
Capacity	- 5/8" (16mm)
Impacts per minute	- 1200 - 1400





< M2072

Air Impact Wrench set - 15 pc

Content :
M2062 included
Impact Deep Socket with Plastic Sleeve (mm) :
17 - 19 - 21
Impact Deep Socket (mm) : 22 - 23 - 24
Oil Pot
Hex Key - 4mm
Nipple
Mini Oiler

Air impact wrenches

M2034 >

Air Impact Wrench - 3/4" Dr.

- Twin Hammer.
- Light Weight, High Torque.
- 3 Forward Speed & 3 Reverse Speed.
- Maximum Torque 1630 Nm.





Specification :

Square Drive	- 3/4"
No-Load Speed	- 5500 rpm
Max Torque	- 1630 Nm / 1202 ft-lb
Torque Forward	- 1290 Nm / 951 ft-lb
Torque Reverse	- 1356 Nm / 1000 ft-lb
Air pressure	- 90 PSI / 6.3 Bar
Air Consumption	- 195 Liter/Minute
Air Hose (I.D.)	- 13 mm
Air Inlet	- 3/8"
Impacts per min.	- 800 - 1000





M2016 >

Air Impact Wrench - 1" Dr.

Pinless Mechanism

- Powerfull Torque Output

Adjustable Torque

- 3 Forward Torque Setting
- 3 Reverse Torque Setting

Comfortable, Ergonomic Design

- Ergonomically Designed for the operator's comfort
- Long Type with 6" (15cm) Anvil

Specifications

Square Drive	-1"
No-Load Speed	- 5000 Rpm
Max Torque	- 2712 Nm / 2000 ft-lb
Torque Forward	- 1742 Nm / 1285 ft-lb
Torque Reverse	- 1827 Nm / 1348 ft-lb
Air pressure	- 90 PSI / 6.3 Bar
Air Consumption	- 255 Liter/Minute
Air Hose (I.D.)	- 19 mm
Air Inlet	- 1/2"
Impacts per min.	- 5000

Cordless Impact wrenches

M2033 >

Cordless Impact Wrench - 1/2" Dr.
- With 2 batteries

Specification :

Square Drive	- 1/2"
No-Load Speed	- 1800 rpm
Max Torque	- 588 Nm / 430 ft-lb
Voltage	- 18V DC
Charging time	- 1 hour Auto cut-off
Capacity	- 1/2" (13mm)
Weight	- 3 kg (incl. battery 0.53kg)
Impacts per minute	- 2300





< M2038

Mini Cordless Impact Wrench - 3/8" Dr.
- With 1 battery

Specification :

Square Drive	- 3/8"
No-Load Speed	- 2000 rpm
Max Torque	- 240 Nm / 177 ft-lb
Voltage	- 18V DC
Charging time	- 60 ~ 70 mins Auto cut-off
Capacity	- 3/8" (10mm)
Weight	- 2 kg (incl. battery 0.53kg)
Impacts per minute	- 3000

M2041 >

Battery

Specifications :
18V DC
3.0 Ah Li-ion battery

Apply for : M2033, M2038



M2042 >

Battery Charger

Specifications :
18V
2.3 Ah Li-ion battery charger

Apply for : M2033, M2038



Impact sockets

M3322 >

1/2" Impact Socket set - 3 Pc

- Thin wall for sport/racing cars
- Plastic cover for protection against scratching
- Blow-mold case

M3322 : 148mm(L) x 132mm(W) x 450mm(H)

Content :
L = 85ml (mm) : 17 - 19 - 21

Material : CR-MO





< M3314

1/2" Impact Socket set - 14 Pc

M3314 : 230mm(L) x 200mm(W) x 50mm(H)

Content :
L = 39ml (mm) : 10 - 12 - 13 - 14 - 17 - 19 - 22 - 24
L = 78ml (mm) : 17 - 19 - 21 - 22 - 24 - 27

Material : CR-MO

M3316 >

3/4" Impact Socket set - 16 Pc

M3316 : 470mm(L) x 345mm(W) x 84mm(H)

Content :
L = 90ml (mm) : 19 - 21 - 22 - 23 - 24 - 26 - 27
30 - 32 - 33 - 34 - 36 - 38 - 41
L = 95ml (mm) : 46 - 50

Material : CR-MO



Impact adaptor set & wheel nut tools



< M3306

1/2" Dr. Impact Socket set - 6 Pc

M3306 : 110mm(L) x 300mm(W) x 50mm(H)

Content :
L = 88ml (mm) : MS17
L = 88ml (mm) : 15 - 17 - 19 - 21 - 22

Material : CR-V & CR-MO

M1217 >

1/2" Dr. Wheel Lug Socket - 1 Pc

Content :
L = 88ml (mm) : MS17

Material : CR-MO





< M3211

Impact socket adaptor set - 11 Pc

Content :
L = 39mm : 1/4" x 1/4" - 1.4" x 3/8"
3/8" x 1/4" - 3/8" x 3/8" - 3/8" x 1/2"
1/2" x 2/8" - 1/2" x 1/2" - 1/2" x 3/4"
3/4" x 1/2" - 3/4" x 1"
1" x 3/4"

Material : CR-MO

M3234 >

Impact Adaptor set - 6 Pc

M3234 : 150mm(L) x 107mm(W) x 50mm(H)

Content :
Adaptor
- 1/4"(M) : 3/8"(F)
- 3/8"(M) : 1/4"(F) - 1/2"(F)
- 1/2"(M) : 3/8"(F) - 3/4"(F)
- 3/4"(M) : 1/2"(F)

Material : CR-MO



Automotive clutch tools

M9737 >

Self adjusting clutch (SAC) master tool kit - 38 pc

- Master tool kit for the professional disassembling & assembling of all self-adjusting clutches (SAC).
- Necessary for the pre-thightening of the SAC clutch pressure plates before their removal and installation.
- Prevents plate distortion which may prevent the clutch from disengaging or cause dragging.
- Single piece, six arm plate has been designed for SAC clutches with 6/8 locking holes.

Content :

Clamping tool with 6 arms for clutches with 6/8 locking holes.
Face spanner.
Compression strut.
Clutch mandrel set (BMW):
- 15mm x 23mm
- 15mm x 28mm
- 15mm x 34mm
- 15mm x 26.5mm
- 15mm x 32.5mm
- 15mm x 32.5mm (sleeve)

Clutch resetting tool.
Handle for campling tool.
4 x Knurled nuts for threaded bolts.
Three lots of 4 x threaded bolt sets:
- M6 / 1.0 screw thread
- M8 / 1.25 screw thread
- M7 / 1.0 screw thread

Cluth centering tools:
- Centering handle
- Handle adapter
- Clamping cone (15-22mm)
- Clamping cone (22-28mm)
- Centering pin (12mm)
- Centering pin (14mm)
- Centering pin (15mm)
- Centering pin (16mm)
- Centering pin (17mm)
- Centering pin (18mm)
- Centering pin (19mm)











< M9706

Clutch Aligner Tool for Trucks - 6 Pc

Content :
Mandrel NO. 1 (mm) : ø36 - ø45
Mandrel NO. 2 (mm) : ø42 - ø52
Centering Sleeve (mm) : ø20, ø25, ø27, ø30

M9711 >

Clutch Aligner set - 11 pc

Content :
Spigot Adaptor (mm) : ø12 - ø14 - ø15 - ø16
ø17 - ø18 - ø19 - ø20
Mandrel (mm) : 15/19 - 20/26.6 - 23/36





< M3206

Spring Compressor set

Specification :
Compression length 65 - 320 mm

M9409 >

Supporting Device

- The device is indispensable when removing and installing vehicle suspension leg and wheel hub assemblies.
- The device is used in conjunction with an appropriate transmission jack.
- The support takes place via the wheel nuts/studs ensuring positioning of the suspension leg assembly.







Automotive misc tools



< M3808

Strut Nut Kit - 8 Pc

M9711 : 246mm(L) x 115mm(W) x 66mm(H)

Content :
Internal Ø10.5 x 22mm Hex Dr. - 3.5mm PIN.
Internal Ø12.5 x 22mm Hex Dr. - 3.5mm PIN.
Internal Ø14.5 x 22mm Hex Dr. - 5mm PIN.
Internal Ø14 x 22mm Hex Dr. - 2.5mm PIN.
5mm x 60mm(L) x 1/2" Dr.
5.5mm x 48mm(L) x 1/2" Dr.
Internal Ø14.5 x 21mm Hex Dr. - 5mm PIN.
Internal Ø12.5 external Ø15.5 - 3mm PIN.

M9703 >

Tail Pipe Expander - 3 Pc

Content :
Small-Capacity : 1-1/8" to 1-3/4" (29-44mm) I.D
Medium-Capacity : 1-1/2" to 2-7/16" (38-62mm) I.D
Large-Capacity : 2-1/8" to 3-7/16" (54-87mm) I.D





< M3205

Mini Tube Bender set

Content :
One-Hand Bender
Dies : 3/16"(5mm) - 1/4"(6mm) - 5/16"(8mm)
3/8"(10mm) - 1/2"(12mm)



M3232 >

Cooling System & Radiator Cap Master Kit - 33 Pc

Content :

Universal Airvac Coolant Refiller

Extension Tube : ø9.5mm x 600mm (L)

4 Conical Bushes: - 24~53 (Ford)
- 27~50.5
- ø9.5mm Connector
- ø9.5mm L-Type Connector

25 Adaptors:

#01 (060) Mercedes.
#02 Audi (after 2000).
#03 Opel / VW / Ford.
#04 BMW.
#05 BMW.
#06 Audi / Citroen / Fiat / Peugeot.
#07 Volvo / VW (before 2000).
#08 Adjustable Stationary Seat.
#09 50mm Universal Connector
(Used with #08 Japanese and European Cars).
#10 35mm Universal Connector
(Used with #08 Japanese and European Cars).
#11 50mm Universal Connector
(Used with #08 Japanese and European Cars).
#12 Used to link #08 with #09, #10 and #11.
#13 For cars with the cap on the Radiator.
#14 Steel Fastener used with adaptors and seat accessories for Toyota / Suzuki / Nissan.
#15 Honda / Toyota.
#16 Mitsubishi / Ford / Nissan / Mazda.
#17 Ford.
#18 Ford.
#19 Mercedes.
#20 Mercedes.
#21 GM / Ford.
#22 GM / Opel.
#23 BMW E-60 (with Circlip).
#24 Ford Fiesta / Mondeo (after 2010) / Mazda 3 (2005) (with Circlip).
#25 Toyota Previa / RAV 4.



Bearing driver

ø18 - 90mm



< M3203
Universal Bearing Race and Seal Driver - 2 Pc

ø9.5 - 50mm







Oil filling system



< M3215

Transmission Oil Filling System - 15 Pc

Specification :
Capacity: 7.5 Liter

Part Number		Application
M3215-101		FORD 1/8-27 (NPT)
M3215-102		Universal BMW, Honda, Nissan, etc
M3215-103		VW/Audi, Skoda.
M3215-104		VW/Audi, Porsche.
M3215-105		VW/Audi, Mini Copper M10x1.0
M3215-106		VW/Audi DSG M24x1.5
M3215-107		VW/Audi CVT M22x1.5
M3215-108		Mercedes M12x1.5
M3215-109		V/W, Skoda M30x1.5
M3215-110		VW/Audi, Skoda M30x1.5
M3215-111		Universal Flexible 300mm, Honda, Hyundai, Kia, etc.
M3215-112		Volvo 5/16-24(UNF)
M3215-113		Toyota, Lexus M18x1.5
M3215-114		Nissan, Infinity M8x1.0
M3215-115		ATF-Adapter, V/W Passat.



Rethreading & Locking nut extractor set

M2020 >

Master Spindle Rethreading set - 20 Pc



M2020: 332mm(L) x 252mm(W) x 56mm(H)

This 20 Pc set will repair or renew damaged threads on stub axles/ spindles on most vehicles. The dies are made from high tempered steel for strength and durability.

Content :

Imperial sizes :	Metric sizes :	
- 11/16" x 24	- 16 x 1.0	- 22 x 1.0
- 3/4" x 16	- 16 x 1.5	- 22 x 1.5
- 3/4" x 20	- 18 x 1.5	- 24 x 1.5
- 13/16" x 20	- 19 x 1.5	- 24 x 2.0
- 27/32" x 20	- 20 x 1.0	- 25 x 1.5
- 7/8" x 14	- 20 x 1.25	- 27 x 2.0
- 1" x 14	- 20 x 1.5	



< M2008

Wheel Locking Nut Extractor set - 8 Pc

Content

Sockets

- Vertical Grooves / Hex=22mm : ø20 - ø22 - ø24 - ø27
- Horizontal Grooves / 1/2"Dr. : ø23 - ø25

Drift - 150mm : To hammer the socket on the wheel nut.

Punch - 135mm : To remove the wheel nut out of the socket.

M9414 >

Adjustable ball joint splitter for use on cars and commercial vehicle jaw opening 20-30mm.




Pullers

2 Leg Adjustable Pullers >


Manual puller

• Adjustable in width.




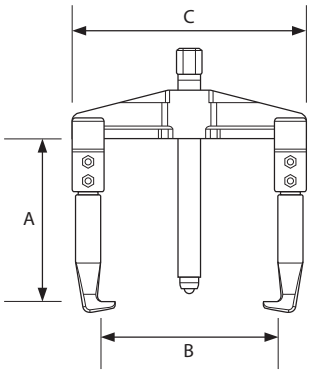

	2 Leg Adjustable Puller							
Model	AMP120310	AMP120315	AMP120720	AMP120725	AMP121230	AMP121235	AMP121240	AMP121550
Capacity	3 ton	3 ton	7 ton	7 ton	12 ton	12 ton	12 ton	15 ton
A (mm)	100	100	150	155	205	200	200	225
B (mm)	95	135	160	190	240	350	510	640
C (mm)	134	176	223	250	325	425	585	717
Weight (kg)	1.1	1.3	3.5	3.6	7.5	9	15	23

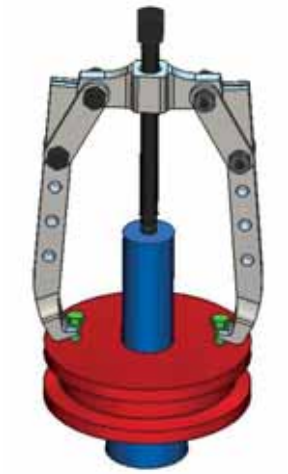

The jaws have a special cut-out to pull

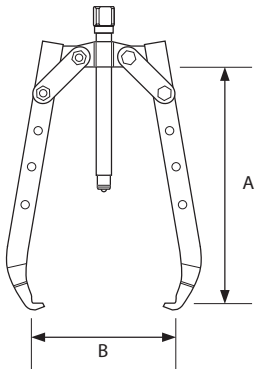

2 / 3 Leg Pullers >

Manual puller

• Can be used with either 2 or 3 jaws.
• Extra long jaws adjustable in 4 positions.
• The jaws have a special cut-out to pull.




	2 / 3 Leg Puller			
Model	AMP230110	AMP230410	AMP230710	AMP230810
Capacity	1 ton	4 ton	7 ton	8 ton
A (mm)	120	210	270	270
B (mm)	125	220	280	330
Weight (kg)	0.7	2.1	3.7	4.0


2 / 3 Leg Self-Centering Pullers >

Manual puller



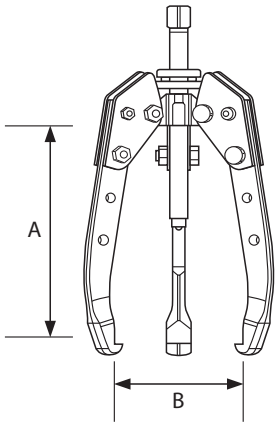

	2 / 3 Leg Puller Self-Centering		
Model	AMPC230110	AMPC230410	AMPC230710
Capacity	1 ton	4 ton	7 ton
A (mm)	120	210	270
B (mm)	125	220	280
Weight (kg)	0.8	2.1	6.7

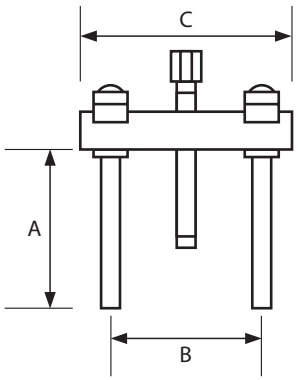



< Push Pullers

Manual puller


Model	Push Puller AMP221102	AMPC221103	AMPC221110
A (mm)	120	120	190
B Max. (mm)	110	140	195
B Min. (mm)	46	46	63
C (mm)	122	156	210
Weight (kg)	1	1.1	3.4


Splitters >

Manual puller

Model	Splitters APS1202	APS1203	APS1204
A Max. (mm)	60	80	110
A Min. (mm)	4	6	10
B (mm)	60	80	110
R	3/8"	3/8"	5/8"
Weight (kg)	0.7	1.3	2.7



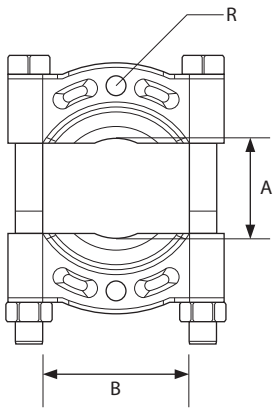


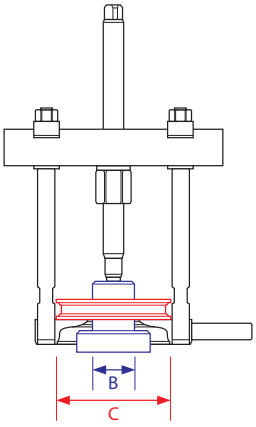




< Splitter Set

Manual puller

Model	Splitters Set AMP320202	AMP320303	AMP321004
A (mm)	100	100	152
B (mm)	55	80	108
C (mm)	90	130	175

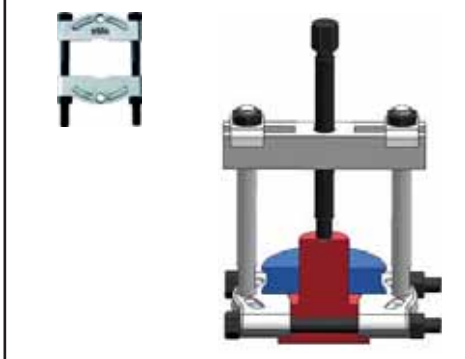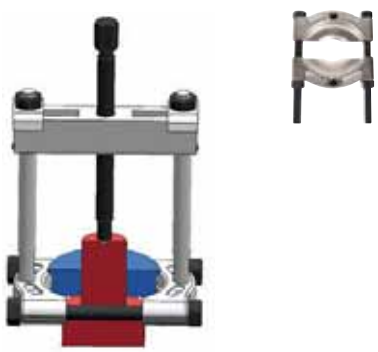Position to Pull	Position to Split
	

Note: Be sure to use the correct position for the required action in order to avoid damaging the Splitter-Set.

Punch, chisel & Hex key sets



< M9009

Ball End Hex Key set - 9 Pc

M9009: 200mm(L) x 70mm(W) x 30mm(H)

Content
Ball End Hex Key : H1.5 - H2 - H2.5 - H3 - H4
H5 - H6 - H8 - H10

Material : CR-V



M9506 >

Pin Punch set - 6 Pc

Content :
Pin Punch (mm) : 2x115, 3x125, 4x150
5x165, 6x180, 8x180

Material : 60SICRV(T61)



< M9516

Punch & Chisel set - 16 Pc

Content :
Pin Punch (mm) : 2x110, 3x120, 4x125, 5x135, 6x145
Centre Punch (mm) : 3x125, 5x150
Taper Punch (mm) : 2x135, 3x145, 4x150, 5x160, 6x170
Chisel (mm) : 10x140, 13x150, 16x165, 19x175

Material : 60SICRV(T61)

Wrench, Twist drill bits & Oil drain plug key set

M3817 >

3/8" Dr. Oil Drain Plug Key set - 17 Pc



Content :
Square (mm) : S8 - S9.5 - S10 - S10.5 - S11 - S12 - S13.1
Hex : H8 - H9 - H10 - H12 - H13 - H14 - H17
Triangle (mm) : XT10
Square Hole (mm) : XS10
Star (mm) : M16

Material : CR-V




M1700 >

Twist drill bits set - 170 Pc

A (mm)	B (mm)	C (mm)	pcs
1.0	12	34	10
1.5	18	40	10
2.0	24	49	10
2.5	30	57	10
3.0	33	61	10
3.6	39	70	10
4.0	43	75	10
4.5	47	80	10
5.0	52	86	10
5.5	57	93	10

A (mm)	B (mm)	C (mm)	pcs
6.0	57	93	10
6.5	63	101	10
7.0	69	109	10
7.5	69	109	10
8.0	75	117	10
8.5	75	117	5
9.0	81	125	5
9.5	81	125	5
10.0	87	133	5



M0001 >

Wrench with Bottle Opener - 8mm



Tyre bead seater & Heavy duty pry bars



< M5001
Tyre Bead Seater

Specification :
Capacity : 20 Liter
Weight : 11.8 kg / 26 lb
Quick-release 1.5" Butterfly Valve

Heavy duty pry bar with textured handle and hammer cap

M9004 >
Pry Bar set - 4 Pc

Content :
L - 200 mm : 6.35 mm
L - 300 mm : 9.50 mm
L - 450 mm : 11.1 mm
L - 560 mm : 12.7 mm



M9036 : 5/8" x 36" - 30° / 16 x 915mm
M9048 : 7/8" x 48" - 30° / 22 x 1220mm
M9056 : 1" x 56" - 30° / 25.4 x 1422mm



Dead blow hammer & Magnetic holders

< M9930

Dead Blow Hammer - 4 kg, length 762mm



M9911 >

Magnetic Holder

- Flexible shape.
- Easy to use from vertical to horizontal surface.







< M9922

Magnetic Holder


- For (air) impact wrench & scokets, markers, torque wrench & other tools.
- 400 mm Magnetic hook "O" + "U".


M9900 & M9901 >

Magnetic Tool Strips

- Magnetic on both sides for easy use on metal surface.
- Can also be fixed on a wall with screws.
- Tools are not included.

M9900 : 300mm
M9901 : 600mm

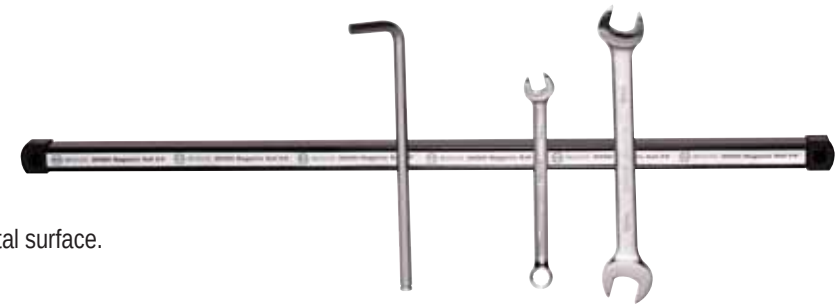

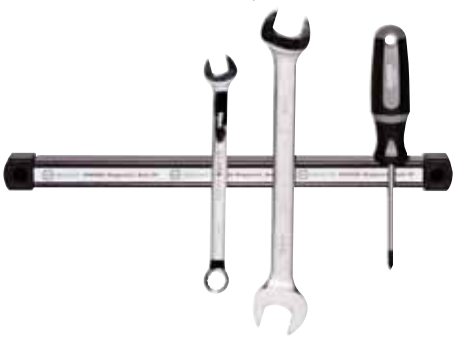

Induction heater

HR8000 >

Induction Heater set

- *All packed in strong aluminum suitcase.*
- *Included 5 accessories.*

Specification :

Voltage : 230V / 50-60Hz / 3 Amp
Power : 1500W

Content :

Induction coil (mm) : ø19 - ø20
Induction cable (mm) : 600
Induction coil : U-Shape
Induction pad (mm) : ø75















HRK8007 >

Induction Heater Coil set - 7 Pc

Content :

Induction coil (mm) : ø13 - ø19 - ø23 - ø26 - ø32 - ø38 - ø45





Hot stapler

HS7000 >









Hot Stapler set
- All packed in strong aluminum suitcase.
- Included 6 different type staples.

Specification :
Voltage : 230V / 50-60Hz / 0.15 Amp
Power : 40-50W

	HS7000		Article nr.
1	M-Staple (Φ 0.6mm) Outside corner		HSS7006M
2	S-Staple (Φ 0.6mm) Large surface		HSS7006S
3	Z-Staple (Φ 0.6mm) Stitch tears		HSS7006Z
4	S-Staple (Φ 0.8mm) Large surface		HSS7008S
5	V-Staple (Φ 0.8mm) Inside corner		HSS7008V
6	Z-Staple (Φ 0.8mm) Stitch tears		HSS7008Z

M9907 >

Rubber Dolly set - 7 pc

M9907: 340mm(L) x 178mm(W) x 38mm(H)

Content
Heel Dolly
Long Type Heel Dolly
Double End Dolly
Curved Dolly
Utility Dolly (General purpose dolly)
Double End Hand Dolly
Long Type Curved Dolly





M9807 >


Dolly & Hammer set - 7 pc

- Full polished.
- Drop forged steel dollies & hammers.

M9807: 340mm(L) x 178mm(W) x 38mm(H)

Content
Standard Bumping Hammer
Pick & Finish Hammer
Shrinking Hammer
Utility Dolly
Curved Dolly
Heel Dolly
Toe Dolly



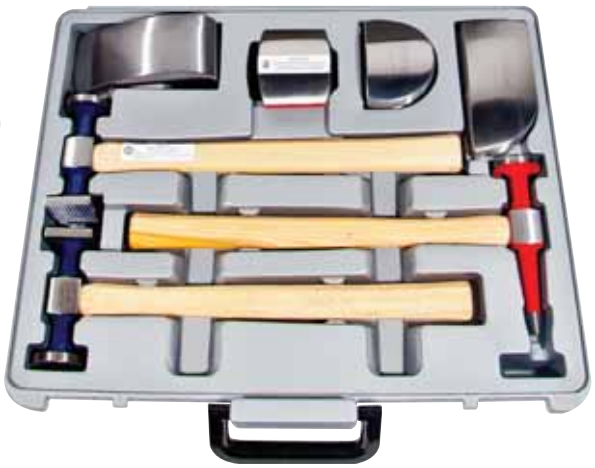

M9916 >

Ball Pein Hammer - 685g

Specification :
Hammer Head - 450g
Length - 325mm





< M9924

Ball Pein Hammer - 1 kg

Specification :
Hammer Head - 680g
Length - 384mm

Mechanix display unit

M9999 >

Mechanix Display Unit

• *Tools are not included.*

M9999 : 945mm(L) x 500mm(W) x 2320mm(H)

Content :

Back Pannel : 2320 x 945mm

Bottom Shelf : 915 x 385 x 32mm

Shelf : 915 x 385 x 32mm

Hooks : 50 x 3" - 50 x 4"

Optional :

M9999-S : Shelf for display, included supports.

M9999-03 : Box for 50 hooks - 3"

M9999-04 : Box for 50 hooks - 4"




OMEGAMECHANIX
ENGINEERED TO LAST
OMEGAMECHANIX
ENGINEERED TO LAST
13-Piece
105-Piece

Accessoiries













OMEGAMECHANIX™
ENGINEERED TO LAST

Index

Jump starters & Battery charger	Page 70 - 72
Work mat	Page 73
Creepers	Page 74
Creepers & Roller seats	Page 75
Automatic tyre inflators	Page 76 - 77
Industrial diesel heaters	Page 78
Gas Forced heaters / LPG	Page 79
LED work light	Page 80
Work lights & cable reel	Page 81
Oil drain pans & Recycling reservoirs	Page 82
Mini air guns & Air compressor	Page 83
Hand winch, Cable & Power puller	Page 84
Electric winch	Page 85
Spare parts	Page 86 - 91
Index	Page 92 - 93

Jump starter

IJS6000 >

Intelligent Jump Start and Mobile Device Charger.

Scan me for demonstration video

IJS6000

- Start current: 300A.
- Peak current: 600A.
- Will start a 12V gasoline engine (up to 5 liter) with internal-voltage of just 0.05V in a car battery.

IJS6000D

- Start Current: 350A.
- Peak Current: 700A.
- Will start a 12V gasoline engine (up to 5.0 liter) and diesel cars (up to 2.0 liter engine) with internal voltage of just 0.06V in a car battery.

- Output 1: 5V/2A.
- Output 2: 12V Jump Starter.
- Input: 5V/2A.
- Battery capacity: 6000mAh/22.2wh.
- Operating temperature: -20 °C ~ 60 °C.
- The world's slimmest 'pocket' jump start at this power level.
- High end and high capacity internal lithium-polymer battery.
- Re-charge from a laptop computer or 5V USB mains charger plug (not supplied).
- 'SMART' jump start cables with thickened copper core.
- 3 in 1 mobile charging cables for smartphone and tablets.
- 0.5W LED torch and SOS signal.
- Safe and reliable technology.
- Excess demand failsafe cut-out to protect unit and car.
- Microcomputer control circuitry.
- Reverse polarity protection.
- Output short circuit protection.
- Excessive voltage protection.
- Excessive current protection.
- No electrical spiking.
- Size: 130mm x 67mm x 15mm.
- Weight: 170g.
- Neoprene carry case included.















IJS11000 >

Intelligent Jump Start and Mobile Device Charger.



- Start current: 400A.
- Peak current: 800A.
- Will start all 12V vehicles with internal voltage of just 0.06V in a car battery.

- Output 1: 5V/2A.
- Output 2: 12V Jump Starter.
- Input: 15V/1A.
- Battery capacity: 11000mAh/41wh.
- Operating temperature: -20 °C ~ 60 °C.
- The world's slimmest 'pocket' jump start at this power level.
- High end and high capacity internal lithium-polymer battery.
- 'SMART' jump start cables with thickened copper core.
- 3 in 1 mobile charging cables for smartphone and tablets.
- 0.5W LED torch and SOS signal.
- Safe and reliable technology.
- Excess demand failsafe cut-out to protect unit and car.
- Microcomputer control circuitry.
- Reverse polarity protection.
- Output short circuit protection.
- Excessive voltage protection.
- Excessive current protection.
- No electrical spiking.
- Size: 174mm x 75mm x 29mm.
- Weight: 390g.
- Neoprene carry case included.





Jump starter & Battery charger

IJS8000 >

Intelligent Jump Start and Mobile Device Charger

IJS8000

- Start current: 370A.
- Peak current: 750A.
- Will start a 12V gasoline engine (up to 5 liter) with internal voltage of just 0.05V in a car battery.
- Output 1: 5V/2A.
- Output 2: 12V Jump Starter.
- Input: 5V/2A.
- Battery capacity: 8000mAh/22.2wh.
- Operating temperature: -20 °C ~ 60 °C.
- The world's slimmest 'pocket' jump start at this power level.
- High end and high capacity internal lithium-polymer battery.
- Re-charge from a laptop computer or 5V USB mains charger plug (not supplied).
- 'SMART' jump start cables with thickened copper core.
- 3 in 1 mobile charging cables for smartphone and tablets.
- 0.5W LED torch and SOS signal.
- Safe and reliable technology.
- Excess demand failsafe cut-out to protect unit and car.
- Microcomputer control circuitry.
- Reverse polarity protection.
- Output short circuit protection.
- Excessive voltage protection.
- Excessive current protection.
- No electrical spiking.
- Size: 138mm x 76mm x 23mm.
- Weight: 300g.
- Neoprene carry case included.









I-7015 >

Fully automatic battery charger for 12 Volt batteries

- Designed to increase battery performance and life. ACDelco™ Charger provides battery maintenance function that may help to recondition a battery.
- Fully automatic "pulse cycle" charging.

Safety functions:

- Reverse polarity protection.
- Spark-proof when clips touch each other.
- Short-circuit and over-charge protection.
- Desulfating battery plates to extend battery lifetime and increases ability of taking charge.
- User friendly "connect & standby" operation for DC cable.
- Battery maintenance/reconditioning function reactivates flooded & sulfated lead-acid batteries.
- Reinforced activation function.
- Battery tester for quick battery trouble shooting.
- Auto wake-up function (Stage 4).
- 4-Stage pulse charging.
- Multiple battery charge function.
- Charging rate: 2/10/20/30/40Amp.
- Charges most lead acid battery types. The ACDelco™ Charger will charge most types of lead acid batteries plus Gell, AGM, Marine type, etc.
- The charger wakes up automatically to 'top off' battery when needed.






Work mat

C-9802 >

2 fold EVA kneel pad
Size: 450 x 210 x 30mm

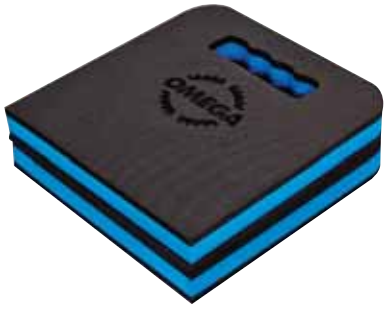
C-9803 >

3 fold EVA work mat
Size: 1210 x 420 x 30mm









< C-9806

6 fold EVA work mat
Size: 1210 x 420 x 30mm

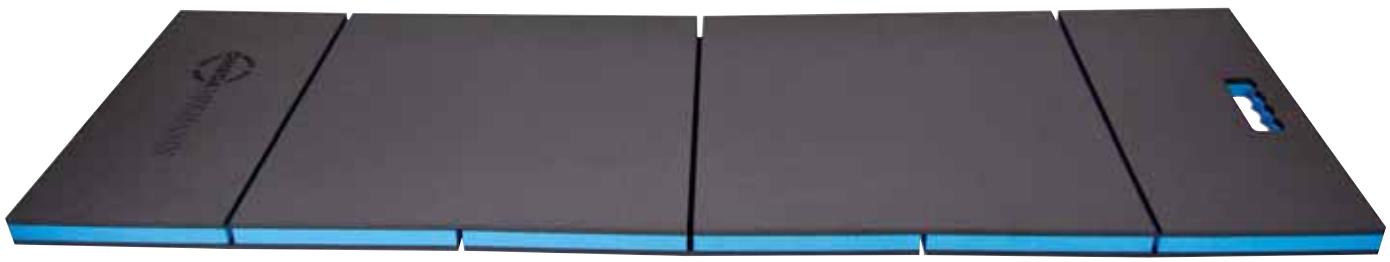

Creepers

CP4031 >

Bone-ster

Size: 1092 x 594mm

The Bone-ster double-ribbed one-piece body gives an incredible 182 kg capacity. The Bone-ster features strong, custom molded 7,6 cm diameter wheels with molded in place 2,25 cm wide tyres.



Custom-Molded Wheels



< CP6031

The Bone

Size: 1194 x 648mm

The Bone has custom-molded 13 cm diameter wheels. With 2,5 cm wide tyres. The heavy American made steel caster frames have dual-race ADJUSTABLE ball bearing swivels and are thrubolted to the creeper body.

The original Bone creeper sets the standard for the highest quality, best working creeper ever made that supports users up to 136 kg less than 4,5 cm off the ground.

CP7031 >

The Rough Rider

Size: 1194 x 648mm

The Rough Rider profiled with 13,6 cm wheels and with 3,5 cm wide tyres for outdoor use.

It also has ground clearance of 7,3 cm.



Profiled Wheels



< CP5031

The Tail Bone

Size: 806 x 711 x 584mm

The Tail Bone is designed to be easier to use, more comfortable, more durable and a better value than any other mechanic's stool on the market. The extra wide (81,3 cm) uniquely designed tripod base, a naturally stable working platform, even on uneven surfaces.

The entire stool swivels with your body. The Tail Bone cruises around at a low 30,5 cm off the ground, making it the perfect height for any job that requires you to get low! The Tail Bone has wide (2,5 cm) custom-molded, 13 cm diameter wheels. Capacity 159 kg.

Also available with outdoor wheels

Creepers & Roller seats

CP-9605 >

120cm (47") Professional Creeper

- Converts easily from creeper to seat or from seat to creeper.
- Finger safe and friendly (un-)lockingsystem.
- Soft vinyl padded.
- Heavy Duty Metal Frame.
- Six Ø 6cm swivel castors for smooth operation.
- Creeper 120cm / Seat 48cm high.









C-9836 >

102cm (40") Professional PVC Creeper

- Six Ø 7.5cm PVC castors.
- Storage compartments for tools, bolts/nuts.
- Incorporated grip.
- Molded to body shape for extra comfort.





< RS-9833

Pneumatic roller seat with one tray.

- Seat Ø 31cm.
- Seat adjustable in height from 38-51cm.
- Convenient tool tray allows you to keep what you need within arms reach.
- Extra 360° rotating tool tray for added storage space for tools, bolts/nuts.
- Innovative five Ø 6cm castors design.

Automatic tyre inflators

The Omega Mechanix ATI has special features that not only saves labor and improves the safety of your employees, it also prevents damage and/or inefficient use of the material/equipment of your customers. This device is one of the safest of its kind. The OPS (Over Pressure System) is an extra feature that allows to inflate with extra pressure to set the tyre correct on the wheel. After over-pressure is reached, the pressure will go down automatically to the preset pressure.

Scan me for demonstration video

TI-10711 >

Max inlet air supply:
10 BAR / 1000 kPa

Operating pressure:
Min: 0.3 BAR / 35 kPa
Max: 7.0 BAR / 700 kPa

Includes:
1x controle unit.
1x 10m inflator hose with optional tyre chuck.
1x inflator hose storage hook.
Silencer.





< TI-10721 / TI-11221

TI-10721
Max inlet air supply:
10 BAR / 1000 kPa

Operating pressure:
Min: 0.3 BAR / 35 kPa
Max: 7.0 BAR / 700 kPa

TI-11221
Max inlet air supply:
15 BAR / 1500 kPa

Operating pressure:
Min: 0.3 BAR / 35 kPa
Max: 12.0 BAR / 1200 kPa

Includes:
1x controle unit.
1x 10m inflator hose with optional tyre chuck.
1x inflator hose storage hook.
Emergency switch equipped with 8m cable + HAN4 = 5 pin connector.
Door switch equipped with 2m cable + HAN3 = 4 pin connector.
Silencer.

TI-11224

Max inlet air supply:
15 BAR / 1500 kPa

Operating pressure:
Min: 0.3 BAR / 35 kPa
Max: 12.0 BAR / 1200 kPa
4 outlets

Includes:
1x controle unit.
4x 10m inflator hose with optional tyre chuck.
1x inflator hose storage hook.
Emergency switch equipped with 8m cable + HAN4 = 5 pin connector.
Door switch equipped with 2m cable + HAN3 = 4 pin connector.
Silencer.





Door switch

TI-10721 - TI-11221 - TI-11224



Emergency switch

TI-10721 - TI-11221 - TI-11224

TI-00001 >

- Tyre chuck.
- Screw in the core valve with the tyre chuck.
- No air loss / no pressure loss.
- Easy and safe.





TI-00003 >

- Tyre chuck with silencer.
- Deflating of the tyre with the tyre chuck with 25% noise reduction.





Industrial diesel heaters

- Mobile air heater.
- Operate on diesel oil or kerosene.
- Stainless steel combustion chamber with fan cooling.
- With flame sensor.
- When out of oil, heater will cut off the power.
- Fixed oil display.
- Cut-off protection, re-plugged in will not work automatically.
- Low pressure atomization, combustion completely.
- Waterproof class IPX4.

Certificates: CE /RoHS





< HRD70

Heating output 70,000 BTUs (20.52 KW)
Fuel consumption: 1.7 kg/h (Tank 24 L)
Air output: 600 m3/h

HRD100 >

Heating output 100,000 BTUs (29.31 KW)
Fuel consumption: 2.5 kg/h (tank 24 L)
Air output: 720 m3/h



Gas Forced heaters / LPG

- Portable air heater.
- Operate on propane gas (LPG).
- With over-heating protection.
- Special nozzle, with strong oxygen supply make combustion complete.
- Cut-off protection avoid gas leaking.
- Deflation and ignition operate design.
- Ideal for construction sites, utility/farm buildings, sports events, barns and factories.
- Ignition: piezo.
- 1.5m hose included.

Certificates: CE /RoHS



< HRP42

Heating output 42,000 BTUs (12.31 KW)
Fuel consumption: 0.74 kg/h Air output: 320 m3/h

HRP100 >

Heating output 100,000 BTUs (29.31 KW)
Fuel consumption: 2.18 kg/h
Air output: 650 m3/h



LED work light



< PL-1001

Rechargeable Pocket Light - SMD LED, with Magnet

- LED: 24 SMD LED, On / Off Switch with full bright, half bright light.
- Luminous Flux: 240 LM for full-bright, 120 LM for half bright.
- Battery: 3.7V, 1100mAh Lithium-Polymer battery.
- Operating time: 1.5 hours for full-bright, 3 hours for half-bright.
- Charging time: 2-2.5 hours.
- Protection: Overcharge, overdischarge and auto shut off function.











Orange
PL-1001/O



Black
PL-1001/B



Green
PL-1001/G

PL-1007 >

Rechargeable stripe LED Worklight

- Stripe LED.
- Magnetic Base.
- Provides a beam of 40 - 50 LM.
- 3,6V Li-ion Battery.
- Adjustable in many positions.
- Charging time: Approximately 1.5 Hours.
- Operating time: Approximately 3.5 Hours.













USB Recharge

< PL-2300

USB Rechargeable Multifunctional Worklight

- Comes with COB LED and UV LED.
- Has a function for Low-High-UV LED.
- Magnetic Base and Hook.
- Provides a beam of 230 LM.
- USB Recharge with a 3,7V Li-ion Battery.
- Adjustable in many positions.
- Charging time: Approximately 3.5 Hours.
- Operating time: Approximately 3 Hours.

LED work light & cable reel







< PL-1016

LED hand lamp

- 3W COB LED hand lamp.
- Provides a wide angle beam of 205 LM.
- Battery: 3.7V Li-ion 2200mAh 8.14Wh.
- Operating time: 3-3.5 hours.
- Charging time: 4.5-5.5 hours.
- The light can be charged in the charging base as well as directly with the adaptor.
- 360° swivel hanging hook / belt clip incl. magnet.

PL-514 >

13 Watt, Transistorised AC
Double Fluorescent TL Work Light

- 230 Volt AC, 50Hz.
- Hanging Hook.
- 2 Magnetic Holders.
- 5 Meter Cable.
- On/Off Switch with Cover.
- Water Resistant (IP44).



Magnetic Holders Included



PL-530 >

30 Watt T8 Engine Work Light Fluorescent Lamp

- Adjustable mounting clamps 1,15 – 1.80 meter.
- Aluminum Frame with metal end covered by EVA.
- End of light and hook are PP.
- Provides 400 - 500 LM.
- 5 meter cable.
- 230V-50Hz, VDE Plug.
- CE certificate.



PL-1200C >

Cable Reel

- Plug & Socket.
- Input Cable: 1M, 3x1.5mm2.
- Output Cable: 12M, 3x1.5mm2.
- Voltage: AC230V 50Hz.
- Maximum Load: - Coiled up 900W.
  - Unwound 2300W.



Oil drain pans & recycling reservoirs





^ PO-08

Oil drain pan
Capacity: 8 Liter
Size: 500 x 400 x 125mm
Approximate (inner) diameter: 345mm

- High density polyethylene.
- Large handles and integraded pouring spout.
- Handles for left and right handed use.
- Multi functional (oil / antifreeze / other liquids).

PO-16 >

Oil drain pan
Capacity: 16 Liter
Size: 570 x 470 x 150mm
Approximate (inner) diameter: 410mm

- High density polyethylene.
- Large handles and integraded pouring spout.
- Handles for left and right handed use.
- Multi functional (oil / antifreeze / other liquids).



< PO-10

Oil recycling reservoir
Capacity: 10 Liter
Size: 567 x 321 x 126mm

- Double Function: Oil drain pan & recycling reservoir.
- Large handles for left and right handed use.
- Multi functional (oil / antifreeze / other liquids).



PO-44 >

Oil recycling reservoir with wheels
Capacity: 44 Liter
Size: 885 x 495 x 188mm

- Double function: Oil drain pan & recycling reservoir.
- Large handles for left and right handed use.
- Wheels for easy and light handling.
- Multi functional (oil / antifreeze / other liquids).
- Small holes under the drain cap to prevent small parts from falling into the reservoir.



Mini air guns & Air compressor

M1401 >

1/4" PT Air blow gun with quiet safety nozzle



PA-01 >

Mini air blow gun



- Nozzle with safety tip.
- Thanks to the extra holes in the nozzle you get an even and safe airflow.
- Body material: Nylon.
- Nozzle material: Brass.
- Working pressure: 90 PSI (0.6 MPa).
- Sound level: 70 dBA.
- Air consumption (90 PSI/6.2 BAR): 164 Liter/Minute.
- Temperature range: - 20°C ~ 70°C.
- Air inlet:
    1. Thread type: 1/4"NPT or 1/4"PT.
    2. Plug material: Steel.



< PA-02

Mini Air Blow Gun with Turbo Tip.

- The turbo-tip creates a stronger air output.
- Body material: Nylon.
- Nozzle material: Brass.
- Working pressure: 90 PSI (0.6 MPa).
- Sound level: 83 dBA (W/O Turbo Tip: 75 dBA).
- Air consumption (90 PSI/6.2 BAR): 381 Liter/Minute.
- Temperature range: - 20°C ~ 70°C.
- Air inlet:
    1. Thread type: 1/4"NPT or 1/4"PT.
    2. Plug material: Steel.

W2001 >

High Flow Air Compressor.








- Pressure Max. 7 BAR (100 PSI).
- Air flow 30 Liter/Minute.
- Large and powerful motor to provide robust performance.
- Supply cord with alligator clips.
- Build-in pressure gauge.
- Build-in amber color warning light.
- ON/OFF switch for compressor and warning light.
- Sturdy housing for rough usage.
- Two nozzles adaptors for inflatables; one needle adaptor for sport balls.
- Air hose with V8 connector.
- Plug with 15A fuse for protection.
- Alligator cable assembly with lighter socket.
- Connect direct to the car battery.

Hand winch, Cable & Power puller

2119086, 2119087, 2119089 >

2119089: 2000 kg Handwinch with Handbrake
2119086: (not shown) 960 kg Handwinch
2119087: (not shown) 1500 kg Handwinch

- Solid Gear Construction.
- Black electrostatic discharge coating finish for resistance to corrosion and weather condition.
- Internally lubricated drum and pinion gear bushings.
- Precise gear tooth engagement.
- Smoothly rotating handle.
- Reinforcement in frame for added strength.

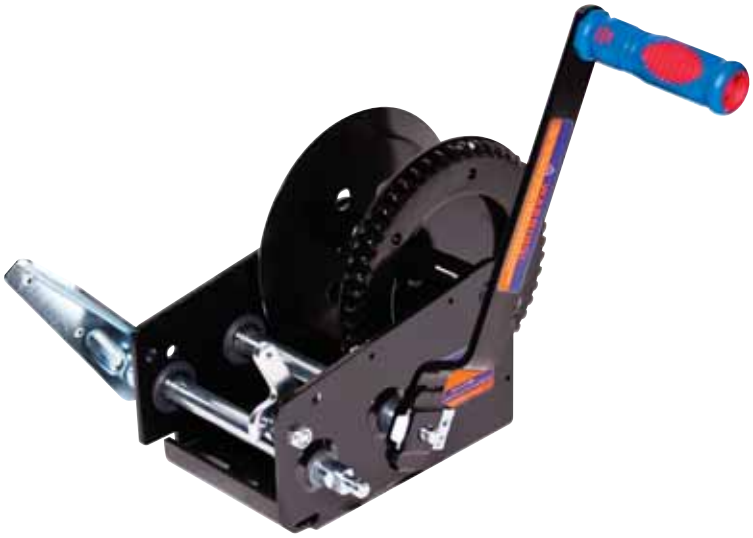

	2119086	2119087	2119089
Max. pulling capacity	960 kg	1500 kg	2000 kg
Working capacity	320 kg	500 kg	650 kg
Gear ratio	4:1	4:1	5:1/12:1
Solid gear construction	✓	✓	✓
Black coated finish	✓	✓	✓
Precise gear tooth engagement	✓	✓	✓
Gear	1 gear, 2 way, 1 speed design	2 gear, 2 way, 1 speed design	1 gear, 2 way, 2 speed design
Package	1 set/color box	1 set/color box	1 set/color box



< 2119088

10m wire cable

- Nominal Breaking Load: 1,905kg.
- Galvanized Aircraft Cable with one forged hook.
- Package: 1 Pc / plastic bag.
- Diameter 5mm.
- Cable Length 10m.

2119077, 2119080 >

2119077: 4000 kg Double gear hand power puller
2119080: 2000 kg Double gear hand power puller

- One piece body frame construction chrome/zinc plated and polished to resist rust.
- Drop forged hanging bracket swivel 360° for all positions.
- Drop forged steel hook with spring safety latch.
- Easy to reach cable release works one notch at a time for maximum safety.
- Heavy polished steel ratchet arm for smooth non-binding operation.
- Heavy-Duty stamped steel provides added strength in ratchet wheel, drive pawl and stop pawl.
- Heat treated heavy-duty bolts in handle & body.
- Heavy-Duty galvanized aircraft cable.
- Heavy-Duty metal safety shield.



U0705 >

Electric Winch

Rolling Load Capacity 5000 kg (double line) / 3000 kg (single line)

Rated Single Pull

First Layer 560 kg

Half Spool 410 kg

Full Spool 230 kg

Single Line Speed

Full load - 35cm/min

No load - 85cm/min

Doubleline speed is half of single line specifications.

FEATURES:

- Wide outdoor applications - Boat launching, lawn and garden work or vehicle emergency use.
- Capable of handling rolling loads up to a capacity of 3.000 kg. Maximum rolling loads of 500 kg at 45° upward.
- Mechanical self-brake system automatically brings winch to a standstill when winch is set off.
- Adaptor plate attached for winch mounting on flat surface capable of sustaining rated load.
- Standby emergency hand crank equipped for use on low battery occasion.
- Optional pulley block available for handling rolling load up to 5.000 kg.
- Cable length 13m.



Index

2	
2119077	84
2119080	84
2119086	84
2119087	84
2119088	84
2119089	84

A	
AMP120310	56
AMP120315	56
AMP120720	56
AMP120725	56
AMP121230	56
AMP121235	56
AMP121240	56
AMP121550	56
AMP221102	57
AMP221103	57
AMP221110	57
AMP230110	56
AMP230410	56
AMP230710	56
AMP230810	56
AMP320202	57
AMP320303	57
AMP321004	57
AMPC230110	56
AMPC230410	56
AMPC230710	56
APS1202	57
APS1203	57
APS1204	57

C	
C-9802	73
C-9803	73
C-9806	73
C-9836	75
CP4031	74
CP5031	74
CP6031	74
CP7031	74
CP9605	75

H	
HR8000	62
HRD70	78
HRD100	78
HRK8007	63
HRP42	79
HRP100	79
HS7000	64
HSS7006M	64
HSS7006S	64
HSS7006Z	64
HSS7008S	64
HSS7008V	64
HSS7008Z	64

I	
I-7015	72
IJS6000	70
IJS6000D	70
IJS8000	72
IJS11000	71

M	
M0001	59
M0003	86
M0004	29
M0006	15
M0012	14
M0013	14
M0017	17
M0023	12
M0027	13
M0029	13
M0032	54
M0034	29
M0043	29
M0048	13
M0060	54
M0078	17
M0105	24
M0119	27
M0121	30
M0122	30
M0127	12
M0138	54
M0141	30
M0142	30
M030N	40
M0381	30
M0382	30
M110N	40
M1000N	40
M1208	28
M1210	28
M1217	47
M1219	41
M1228	22
M1234	28
M1256	26
M1297	21
M1395	20
M1401	83
M1443	18
M1500	25
M1500N	41
M1700	59
M2008	55
M2012	14
M2016	44
M2020	55
M2033	45
M2034	44
M2038	45
M2041	45
M2042	45
M2060	42
M2062	43
M2063	42
M2064	42
M2072	43
M210N	40
M2212	40
M2214	40
M2238	40
M2305	32
M2308	32
M2312	32
M2339	34
M2402	31
M2405	33
M2408	33
M2412	33
M2435	29
M2502	35
M2560	35
M2562	35
M2563	35
M3203	52
M3205	50
M3206	49
M3211	47
M3215	53
M3232	51
M3234	47
M3306	47
M3314	46
M3316	46
M3322	46
M3350	9
M3379	9
M3397	9 + 10
M3414	22
M3424	41
M3500-MDF02	6
M3531	6
M3591	8
M3593	8 + 10
M3760	7
M3770	7 + 10
M3808	50
M3817	59
M3852	19
M500N	40
M5001	60
M5713	23
M7320	41
M7580	31
M7583	31
M7584	31
M7585	31
M7586	31
M7587	31
M7588	31
M7589	31
M7591	31
M7592	31
M7593	31
M7594	31
M7596	31
M7597	31
M7598	31
M7599	31
M7808	31
M7809	31
M7810	31
M7811	31
M7812	31
M7813	31
M7814	31
M7815	31
M7816	31
M7817	31
M7818	31

Index

M7819 31

M8000 17
M8011 17
M8015 23
M8104 14
M8107 16
M8203 15
M8204 15
M8207 16
M8304 15
M8306 16
M8308 16

M9004 60
M9009 58
M9036 60
M9048 60
M9056 60
M9104 34
M9304 36
M9305 38
M9306 38
M9307 39
M9308 38
M9383 39
M9393 39
M9402 37
M9403 37
M9404 37
M9405 37
M9406 37
M9409 49
M9410 35
M9411 35
M9414 55
M9416 35
M9438 36
M9455 36
M9506 58
M9516 58
M9703 50
M9706 49
M9711 49
M9737 48

M9807 65
M9900 61
M9901 61
M9907 65
M9911 61
M9916 65
M9922 61
M9924 65
M9930 61
M9999 66
M9999-03 66
M9999-04 66
M9999-S 66

MD02 10
MD12 10
MD15 11

P

PA-01 83
PA-02 83
PL-1001B 80
PL-1001G 80
PL-1001O 80
PL-1007 80
PL-1016 81
PL-1200C 81
PL-2300 80
PL-514 81
PL-530 81
PO-08 82
PO-10 82
PO-16 82
PO-44 82

R

RS-9833 75

T

TI-00001 77
TI-00003 77
TI-10711 76
TI-10721 76
TI-11221 76
TI-11224 77

U

U0705 85

W

W2001 83

---PRESS RELEASE---

Omega Mechanix new sponsor of United Autosports

Roosendaal, The Netherlands

Omega Mechanix is one of the sponsors of United Autosports for 2016 and 2017. United Autosports is a well-known GT and sports car team, based in Leeds, West Yorkshire, UK. This year United Autosports are making their debut in the European Le Mans Series. To improve the brand awareness, the logo and the brand name of Omega Mechanix will appear on the Ligier JS P3 cars. In addition, Omega Mechanix also sponsors the GT Cup.

United Autosports

United Autosports was founded in 2009 by businessman Zak Brown and racing driver Richard Dean. United Autosports have raced in a number of different championships, with a vast range of cars and drivers. United Autosports are hugely experienced in racing in the UK and Europe, as well as worldwide, having entered events in Asia, Australia and America.





Omega Mechanix

"Omega Hydraulics and Omega Mechanix' workshop tools has a market leading range of workshop hydraulics equipment which is tried, tested and used by thousands of car and commercial workshops in the UK, along with hundreds of leading Fast Fit locations", United Autosports said. United Autosports sees Omega Hydraulics and Omega Mechanix as quality brands.

Events

The European Le Mans Series serves as the leading championship for endurance racing in Europe. The championship visits seven of the top race circuits in Europe for a two-day event, culminating in a four-hour race. Each event provides plenty of entertainment for the thousands of spectators that attend.
For remaining races check the website of United Autosports: www.unitedautosports.com

---End of Release---

Contact

For more information about this sponsorship, please contact:

Omega Mechanix
Munnikenheiweg 50
4879 NG Etten-Leur
The Netherlands
Tel.: +31 (0)76 206 5002
sales@omegamechanix.nl



OMEGA MECHANIX
Munnikenheiweg 50
4879 NG Etten-Leur
The Netherlands
Tel.: +31 (0)76-2065002
Email: sales@omegamechanix.nl

version 2017-03